
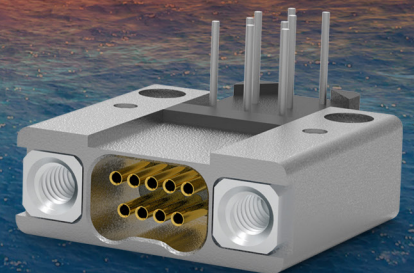


molex

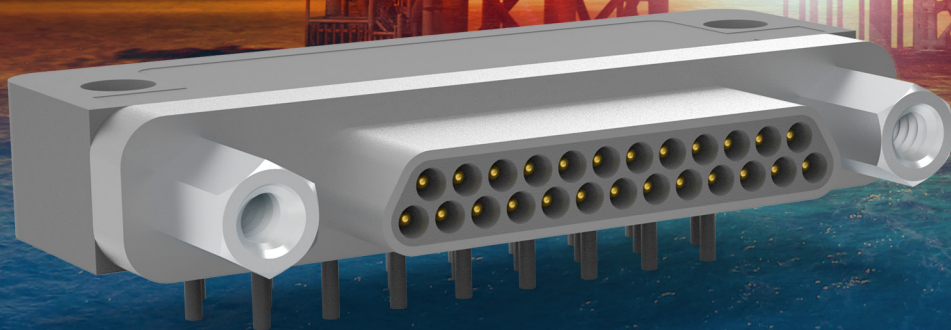

High-Temperature Connectors

AirBorn M Series Micro-D and AirBorn N Series Nano-D

TABLE OF CONTENTS

AirBorn M Series Micro-D High-Temperature Connectors 3

MMHT – I/O Cable (Male) 4

MMHT – I/O Cable (Female) 6

MKHT – Right-Angle Board-Mount (Male) 8

MKHT – Right-Angle Board-Mount (Female) 10

MKHT – Right-Angle Board-Mount with Blind-Clearance Cut (Male)..... 12

MKHT – Right-Angle Board-Mount with Blind-Clearance Cut (Female)..... 14

MKHT – Right-Angle Board-Mount with Through-Clearance Cut (Male)..... 16

MKHT – Right-Angle Board-Mount with Through-Clearance Cut (Female)..... 18

MKHT – PC Board Layouts 20-23

MQHT – Low-Profile I/O Cable (Male) 24

MQHT – Low-Profile I/O Cable (Female) 26

MSHT – Low-Profile, Right-Angle Board-Mount (Male) 28

MSHT – Low-Profile, Right-Angle Board-Mount (Female) 30

MSHT – Low-Profile, Right-Angle Board-Mount with Blind-Clearance Cut (Male)..... 32

MSHT – Low-Profile, Right-Angle Board-Mount with Blind-Clearance Cut (Female)..... 34

MSHT – PC Board Layouts..... 36-37

MTHT – Low-Profile, I/O Cable with Radius Ear (Male) 38

MTHT – Low-Profile, Right-Angle Board-Mount with Radius Ear (Female) 40

MTHT – PC Board Layouts..... 42-43

Wire Codes 44-45

AirBorn N Series Nano-D High-Temperature Connectors 47

NMHT – I/O Cable (Male)..... 48

NMHT – I/O Cable (Female) 50

NKHT – Right-Angle Board-Mount (Male)..... 52

NKHT – Right-Angle Board-Mount (Female)..... 54

NKHT – PC Board Layouts..... 56-59


Wire Codes 60

AIRBORN M SERIES MICRO-D HIGH-TEMPERATURE CONNECTORS

MMHT – I/O Cable (Male)

MMHT connectors are used in high-temperature applications. These rugged cable connectors come with a variety of termination, hardware and wiring options. Custom lengths are available on wire termination products.

DIMENSIONS



DIMENSIONS					
Size	Row	A	B (MAX)	C	D
9	2	0.755	0.334	0.390	0.565
15		0.925	0.484	0.540	0.715
21		1.075	0.634	0.690	0.865
25		1.175	0.734	0.790	0.965
31		1.325	0.884	0.940	1.115
37	3	1.475	1.034	1.090	1.265
51		1.425	0.984	1.040	1.215
100		2.160	1.384	1.432	1.800

SAMPLE PART NUMBER FORMAT: MMHT-212-025-161-41WA

MMHT	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE
SERIES 0.050" Rugged Metal I/O Connector (Male)	ROWS 2 – 2-Row (9-37 contacts) 3 – 3-Row (51 and 69 contacts) 4 – 4-Row (100 contacts)	BODY STYLE 1 – Plug	BODY MATERIAL 2 – High-temp thermoplastic with electroless nickel shell 4 – High-temp thermoplastic with hard black anodized shell 5 – High-temp with stainless steel shell	SIZE 009 – 9 Contacts 015 – 15 Contacts 021 – 21 Contacts 025 – 25 Contacts 031 – 31 Contacts 037 – 37 Contacts 051 – 51 Contacts 069 – 69 Contacts 100 – 100 Contacts	PLATING 1 – 50 µm Au contacts (crimp wire) 3 – 50 µm Au contacts; Au terminations (solder cup, pigtail)	CONTACT/TERMINATION TYPE 11 – Pin, straight, 26 AWG solder cup 1A – Pin, straight, 24 AWG solder cup 1E – Pin, straight, 0.125" lead length*† 13 – Pin, straight, 0.250" lead length*† 14 – Pin, straight, 0.500" lead length*† 16 – Pin, straight, crimped wire	HARDWARE 00 – No hardware 22 – Two fixed jacknut assemblies (62)*** 41 – Two turning jackscrews, Allen head, retaining ring (81)*** 42 – Two long turning jackscrews, Allen head, retaining ring (82)*** 43 – Two turning jackscrews, slot head, retaining ring (83)*** 44 – Two long turning jackscrews, slot head, retaining ring (84)*** 45 – Two turning jackscrews, Allen head, captivated*** (85)*** FF – Float-mount: front panel mounting FR – Float-mount: rear panel mounting	WIRING 00 – None XX – See Wiring Codes

MMHT-212-025-161-41WA



PERFORMANCE

Contact Rating	3 amperes maximum
Operating Temperature	-55° C to 205° C
Test Voltage	600V, RMS, 60Hz
Insulation Resistance	5,000 megohms minimum at 500 VDC
Durability	500 connector mating cycles
Contact Engaging Force	6.0 oz maximum/contact
Contact Separating Force	0.5 oz minimum/contact
Mating and Un-mating Force	10 oz maximum/contact

HIGH-RELIABILITY CONTACT

MIL-DTL-83513

NOTES

*0.018 diameter

**Captivated hardware is factory-installed and non-removable.

***Numbers in parentheses are to be used when ordering size 100.

†Leads are soft copper, suitable for forming.

MATERIALS AND FINISHES


Pin Contacts	Copper-based alloy strip
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shells	Aluminum alloy 6061-T6 per SAE AMS-QQ-A-250/11 or 6061-T6S11 per SAE AMS-QQ-A-200/8
Shell Finishes	Electroless nickel per SAE AMS-2402, Class 3, 500 µm minimum or blackanodized per MIL-A-8625, Type III Class 2, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Interfacial Seal Gaskets	Fluorosilicone per SAE AMS-R-25988
Tolerances (unless otherwise specified)	Angles: ±5° Decimals: ±0.010"; Fractions: ±1/64" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"

Note: Molex can manufacture special configurations to your exact specifications.

molex

MMHT - I/O CABLE (MALE)

STRAIGHT MULTI-ROW CABLE-TO-CABLE

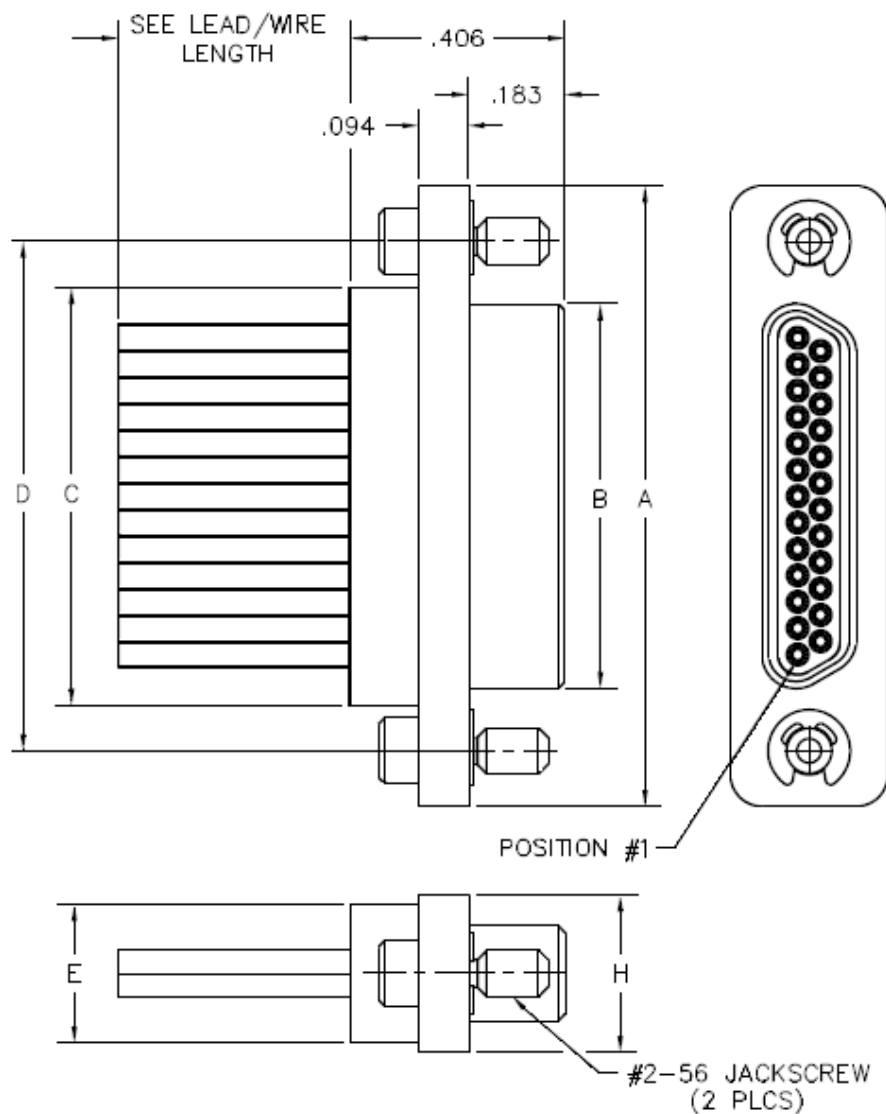


DIMENSIONS								
Size	Row	A	B (MAX)	C	D	E (MAX)	H	Hardware
9	2	0.755	0.334	0.390	0.565	0.270	0.298	#2-56 UNC THD (0.092 Through)
15		0.925	0.484	0.540	0.715			
21		1.075	0.634	0.690	0.865			
25		1.175	0.734	0.790	0.965			
31		1.325	0.884	0.940	1.115			
37		1.475	1.034	1.090	1.265			
51	3	1.425	0.984	1.040	1.215	0.310	0.341	#4-40 UNC THD (0.0147 Through)
100	4	2.160	1.384	1.432	1.800	0.360	0.384	

MMHT – I/O Cable (Female)

MMHT connectors are used in high-temperature applications. These rugged cable connectors come with a variety of termination, hardware and wiring options. Custom lengths are available on wire termination products.

DIMENSIONS

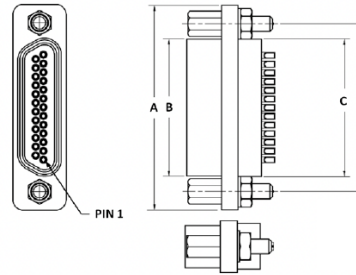


DIMENSIONS					
Size	Row	A	B (MAX)	C	D
9	2	0.755	0.400	0.390	0.565
15		0.925	0.550	0.540	0.715
21		1.075	0.700	0.690	0.865
25		1.175	0.800	0.790	0.965
31		1.325	0.950	0.940	1.115
37	3	1.475	1.100	1.090	1.265
51		1.425	1.050	1.040	1.215
100	4	2.160	1.508	1.432	1.800

SAMPLE PART NUMBER FORMAT: MMHT-222-025-2A3-2200

MMHT	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE
SERIES 0.050" Rugged Metal I/O Connector (Female)	ROWS 2 – 2-Row (9-37 contacts) 3 – 3-Row (51 and 69 contacts) 4 – 4-Row (100 contacts)	BODY STYLE 2 – Receptacle	BODY MATERIAL 2 – High-temp thermoplastic with electroless nickel shell 4 – High-temp thermoplastic with hard black anodized shell 5 – High-temp with stainless steel shell	SIZE 009 – 9 Contacts 015 – 15 Contacts 021 – 21 Contacts 025 – 25 Contacts 031 – 31 Contacts 037 – 37 Contacts 051 – 51 Contacts 069 – 69 Contacts 100 – 100 Contacts	PLATING 1 – 50 µm Au contacts (crimp wire) 3 – 50 µm Au contacts; Au terminations (solder cup, pigtail)	CONTACT/TERMINATION TYPE 21 – Socket, straight, 26 AWG solder cup 2A – Socket, straight, 24 AWG solder cup 2E – Socket, straight, 0.125" lead length* 23 – Socket, straight, 0.250" lead length* 24 – Socket, straight, 0.500" lead length*† 26 – Socket, straight, crimped wire	HARDWARE 00 – No hardware 22 – Two fixed jacknut assemblies (62)*** 41 – Two turning jackscrews, Allen head, retaining ring (81)*** 42 – Two long turning jackscrews, Allen head, retaining ring (82)*** 43 – Two turning jackscrews, slot head, retaining ring (83)*** 44 – Two long turning jackscrews, slot head, retaining ring (84)*** 45 – Two turning jackscrews, Allen head, captivated** (85)*** FF – Float-mount: front panel mounting FR – Float-mount: rear panel mounting	WIRING 00 – None XX – See Wiring Codes

MMHT-222-025-2A3-2200

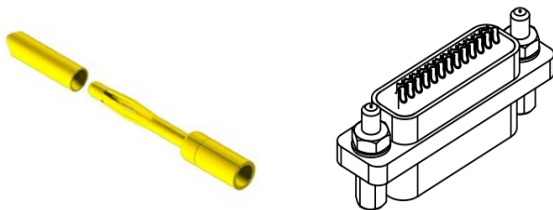

PERFORMANCE

Contact Rating	3 amperes maximum
Operating Temperature	-55° C to 205° C
Test Voltage	600V, RMS, 60Hz
Insulation Resistance	5,000 megohms minimum at 500 VDC
Durability	500 connector mating cycles
Contact Engaging Force	6.0 oz maximum/contact
Contact Separating Force	0.5 oz minimum/contact
Mating and Un-mating Force	10 oz maximum/contact

HIGH-RELIABILITY CONTACT

MIL-DTL-83513

NOTES

*0.018 diameter

**Captivated hardware is factory-installed and non-removable.

***Numbers in parentheses are to be used when ordering size 100.

†Leads are soft copper, suitable for forming.

MATERIALS AND FINISHES


Socket Contact	Brass per ASTM B121/B121M or ASTM B16/B16M or ASTM B453
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shells	Aluminum alloy 6061-T6 per SAE AMS-QQ-A-250/11 or 6061-T6S11 per SAE AMS-QQ-A-200/8
Shell Finishes	Electroless nickel per SAE AMS-2402, Class 3, 500 µm minimum or black anodized per MIL-A-8625, Type III Class 2, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Interfacial Seal Gaskets	Fluorosilicone per SAE AMS-R-25988
Tolerances (unless otherwise specified)	Angles: ±5° Decimals: ±0.010"; Fractions: ±1/64" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"

Note: Molex can manufacture special configurations to your exact specifications.

molex

MMHT DRAWINGS (FEMALE)

STRAIGHT MULTI-ROW CABLE-TO-CABLE

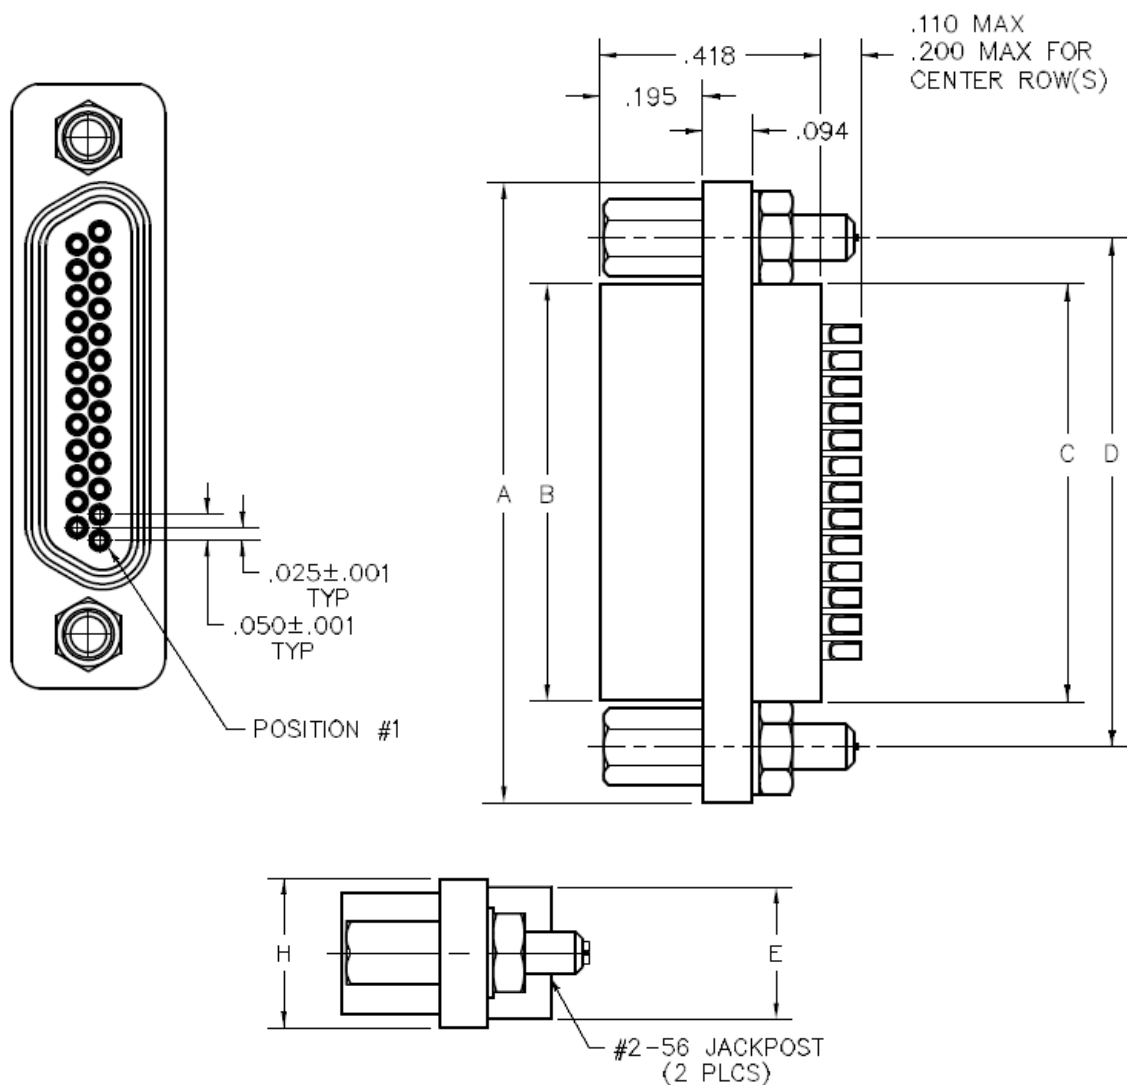


DIMENSIONS

Size	Row	A	B (MAX)	C	D	E (MAX)	H	Hardware
9	2	0.755	0.400	0.390	0.565	0.270	0.298	#2-56 UNCTHD (0.092 Through)
15		0.925	0.550	0.540	0.715			
21		1.075	0.700	0.690	0.865			
25		1.175	0.800	0.790	0.965			
31		1.325	0.950	0.940	1.115			
37		1.475	1.100	1.090	1.265			
51	3	1.425	1.050	1.040	1.215	0.310	0.341	#4-40 UNCTHD (0.0147 Through)
100	4	2.160	1.508	1.432	1.800	0.360	0.384	

MKHT – Right-Angle Board-Mount (Male)

MKHT connectors are used in high-temperature applications where a right-angle, plated through-hole termination is desired for mounting. The narrow footprint on this connector helps save board space.

DIMENSIONS




DIMENSIONS						
Size	Row	A	B (MAX)	D	Z	Hardware
9	2	0.755	0.334	0.565	0.755	#2-56 UNC Threaded Insert
15		0.925	0.484	0.715	0.925	
21		1.075	0.634	0.865	1.075	
25		1.175	0.734	0.965	1.175	
31		1.325	0.884	1.115	1.080	
37	3	1.475	1.034	1.265	1.180	#4-40 UNC Threaded Insert
51		1.425	0.984	1.215	1.220	
69		1.725	1.284	1.515	1.450	
100	4	2.160	1.384	1.800	1.810	

SAMPLE PART NUMBER FORMAT: MKHT-252-031-323-220S

MKHT	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE
SERIES 0.050" Rugged Metal PC Board- Mount Connector (Male)	ROWS 2 – 2-Row (9-37 contacts) 3 – 3-Row (51 and 69 contacts) 4 – 4-Row (100 contacts)	BODY STYLE 5 – Plug, right-angle, narrow footprint with threaded inserts	BODY MATERIAL 2 – High-temp thermoplastic with electroless nickel shell 4 – High-temp thermoplastic with hard black anodized shell 5 – High-temp with stainless steel shell	SIZE 009 – 9 Contacts 015 – 15 Contacts 021 – 21 Contacts 025 – 25 Contacts 031 – 31 Contacts 037 – 37 Contacts 051 – 51 Contacts 069 – 69 Contacts 100 – 100 Contacts	PLATING 3 – 50 µm Au contacts; Au terminations	HARDWARE 00 – No hardware 22 – Two fixed jacknut assemblies (62)*	WIRING 0S – Standard body polarization	
CONTACT/TERMINATION TYPE 32 – Pin, right-angle, 0.109" x 0.020" dia. 33 – Pin, right-angle, 0.140" x 0.020" dia. 34 – Pin, right-angle, 0.172" x 0.020" dia.								

MKHT-252-031-323-220S

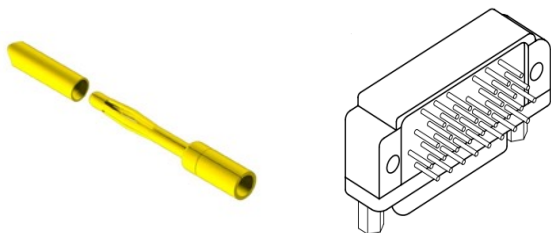

HIGH-RELIABILITY CONTACT

MIL-DTL-83513

NOTES

*Number in parentheses to be used when ordering size 100.

PERFORMANCE




Contact Rating	3 amperes maximum
Operating Temperature	-55° C to 205° C
Test Voltage	600V, RMS, 60Hz
Insulation Resistance	5,000 megohms minimum at 500 VDC
Durability	500 connector mating cycles
Contact Engaging Force	6.0 oz maximum/contact
Contact Separating Force	0.5 oz minimum/contact
Mating and Un-mating Force	10 oz maximum/contact

MATERIALS AND FINISHES

Pin Contacts	Copper-based alloy strip
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shells	Aluminum alloy 6061-T6 per SAE AMS-QQ-A-250/11 or 6061-T6S11 per SAE AMS-QQ-A-200/8
Shell Finishes	Electroless nickel per SAE AMS-2402, Class 3, 500 µm minimum or black anodized per MIL-A-8625, Type III Class 2, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Tolerances (unless otherwise specified)	Angles: ±5° Decimals: ±0.010"; Fractions: ±1/64" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"
Note: Molex can manufacture special configurations to your exact specifications.	

MKHT DRAWINGS (MALE)

RIGHT-ANGLE NARROW-FOOTPRINT THREADED INSERTS

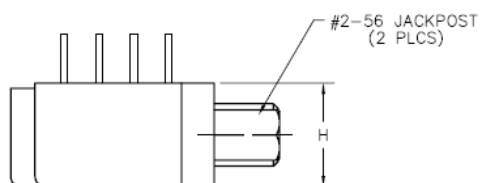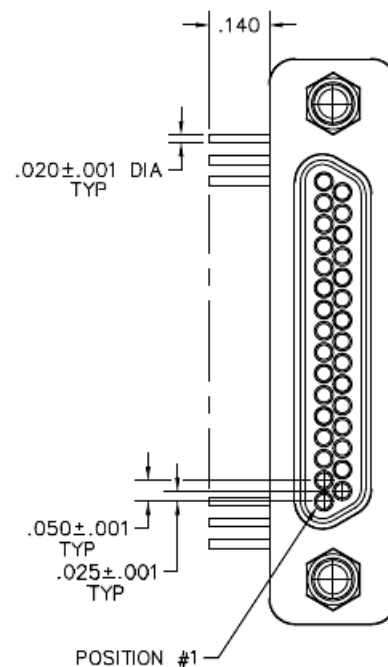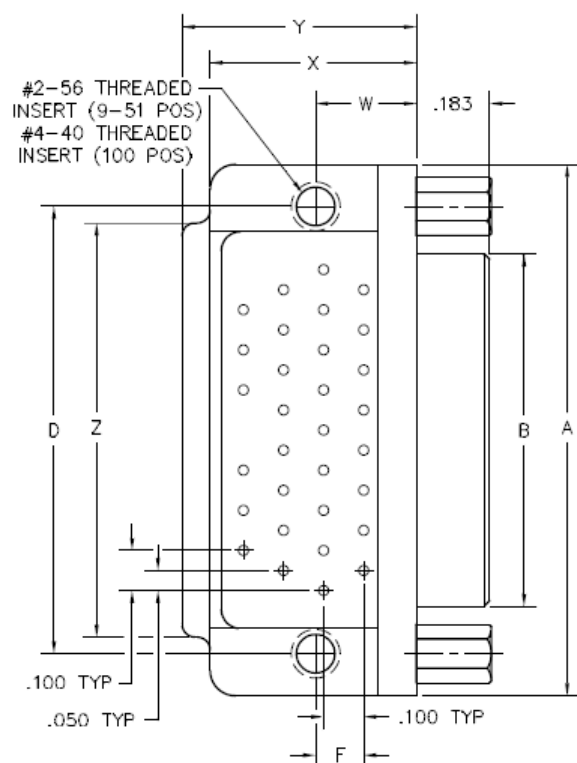


DIMENSIONS

Size	Row	A	B (MAX)	D	F	H	W	X (MAX)	Y (MAX)	Z	Hardware
9	2	0.755	0.334	0.565	0.020	0.298	0.250	0.420	0.420	0.755	#2-56 UNC THD
15		0.925	0.484	0.715	0.120					0.925	
21		1.075	0.634	0.865						1.075	
25		1.175	0.734	0.965						1.175	
31		1.325	0.884	1.115				0.450	0.520	1.080	
37		1.475	1.034	1.265	1.180						
51	3	1.425	0.984	1.215	0.150	0.341	0.300	0.430	0.650	1.220	#2-56 UNC THD
69		1.725	1.284	1.515					0.755	1450	
100	4	2.160	1.384	1.800	0.200	0.384	0.400	0.590	1.000	1.810	#4-40 UNC THD

MKHT – Right-Angle Board-Mount (Female)

MKHT connectors are used in high-temperature applications where a right-angle, plated through-hole termination is desired for mounting. The narrow footprint on this connector helps save board space.

DIMENSIONS



DIMENSIONS						
Size	Row	A	B (MAX)	D	Z	Hardware
9	2	0.755	0.400	0.565	0.755	#2-56 UNC (0.092 Through)
15		0.925	0.550	0.715	0.925	
21		1.075	0.700	0.865	1.075	
25		1.175	0.800	0.965	1.175	
31		1.325	0.950	1.115	1.080	
37		1.475	1.100	1.265	1.180	

SAMPLE PART NUMBER FORMAT: MKHT-262-031-443-220S



SERIES
0.050" Rugged Metal
PC Board- Mount
Connector (Female)



ROWS
2 – 2-Row
(9-37 contacts)
3 – 3-Row
(51 and 69
contacts)
4 – 4-Row
(100 contacts)



BODY STYLE
6 – Receptacle,
right-angle,
narrow footprint
with threaded
inserts and
interfacial seal.



BODY MATERIAL
2 – High-temp
thermoplastic with
electroless nickel
shell
4 – High-temp
thermoplastic with
hard black anodized
shell
5 – High-temp with
stainless steel shell



SIZE
009 – 9 Contacts
015 – 15 Contacts
021 – 21 Contacts
025 – 25 Contacts
031 – 31 Contacts
037 – 37 Contacts
051 – 51 Contacts
069 – 69 Contacts
100 – 100 Contacts



PLATING
3 – 50 µm Au
contacts; Au
terminations




HARDWARE
00 – No hardware
22 – Two fixed jacknut assemblies (62)*



WIRING
0S – Standard
body polarization

CONTACT/TERMINATION TYPE
43 – Socket, right-angle, .109" .020" dia.
44 – Socket, right-angle, .140" x .020" dia.
45 – Socket, right-angle, .172" x .020" dia.

MKHT-262-031-443-220S

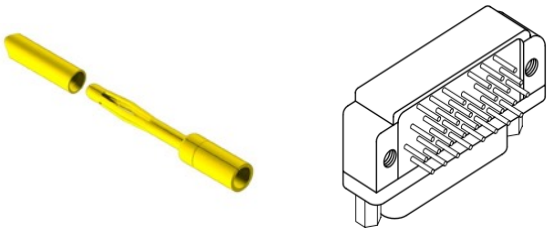

HIGH-RELIABILITY CONTACT

MIL-DTL-83513

NOTES

*Number in parentheses to be used when ordering size 100.

PERFORMANCE

Contact Rating	3 amperes maximum
Operating Temperature	-55° C to 205° C
Test Voltage	600V, RMS, 60Hz
Insulation Resistance	5,000 megohms minimum at 500 VDC
Durability	500 connector mating cycles
Contact Engaging Force	6.0 oz maximum/contact
Contact Separating Force	0.5 oz minimum/contact
Mating and Un-mating Force	10 oz maximum/contact


MATERIALS AND FINISHES

Socket Contact	Brass per ASTM B121/B121M or ASTM B16/B16M or ASTM B453
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shells	Aluminum alloy 6061-T6 per SAE AMS-QQ-A-250/11 or 6061-T6S11 per SAE AMS-QQ-A-200/8
Shell Finishes	Electroless nickel per SAE AMS-2402, Class 3, 500 µm minimum or black anodized per MIL-A-8625, Type III Class 2, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Interfacial Seal Gaskets:	Fluorosilicone per SAE AMS-R-25988
Tolerances (unless otherwise specified)	Angles: ±5° Decimals: ±0.010"; Fractions: ±1/64" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"

Note: Molex can manufacture special configurations to your exact specifications.

MKHT DRAWINGS (FEMALE)


RIGHT-ANGLE NARROW-FOOTPRINT THREADED INSERTS SEAL

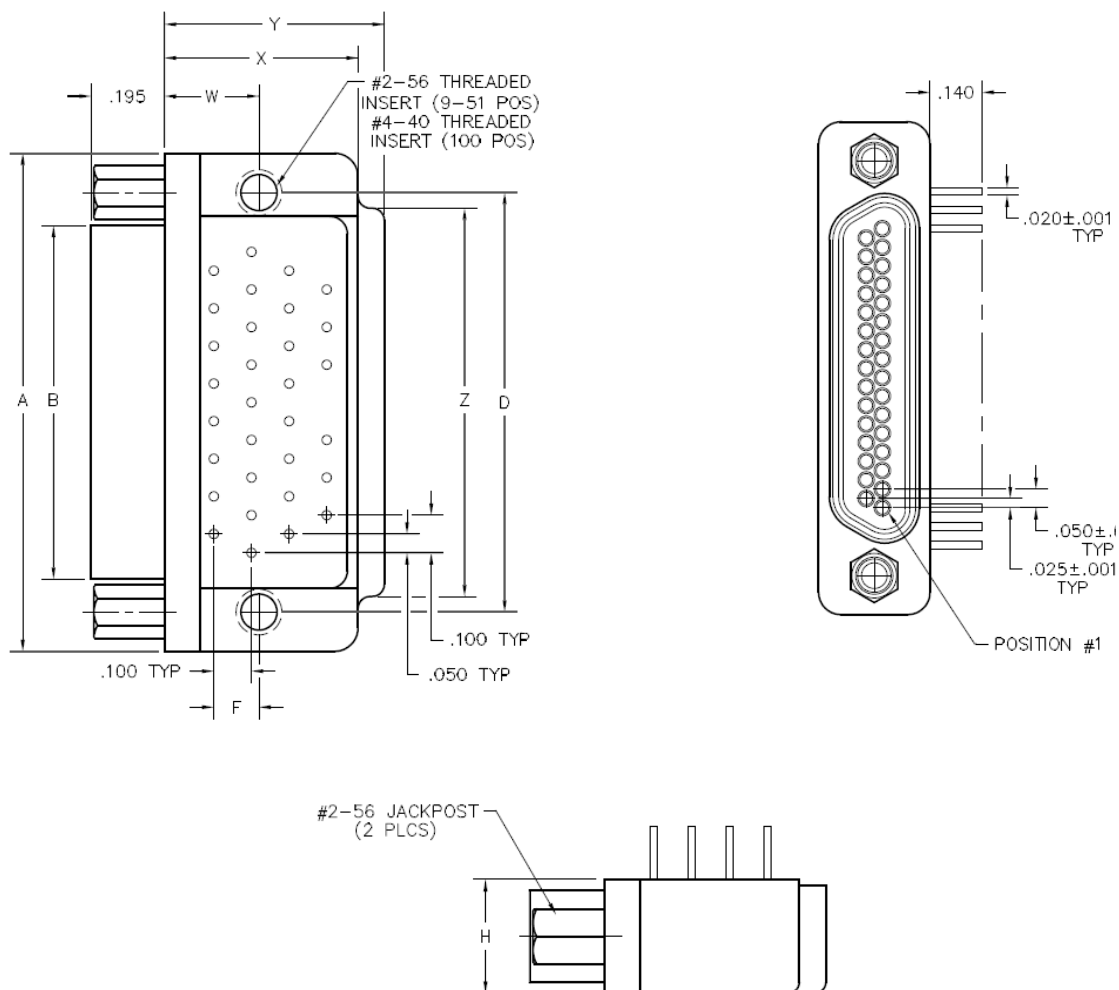

DIMENSIONS											
Size	Row	A	B (MAX)	D	F	H	W	X (MAX)	Y (MAX)	Z	Hardware
9	2	0.755	0.400	0.565	0.020	0.298	0.250	0.420	0.420	0.755	#2-56 UNC THD
15		0.925	0.550	0.715	0.120					0.925	
21		1.075	0.700	0.865						1.075	
25		1.175	0.800	0.965						1.175	
31		1.325	0.950	1.115				0.450	0.520	1.080	
37		1.475	1.100	1.265						1.180	
51	3	1.425	1.050	1.215	0.150	0.341	0.300	0.430	0.650	1.220	
69		1.725	1.350	1.515					0.755	1450	
100	4	2.160	1.508	1.800	0.200	0.384	0.400	0.590	1.000	1.810	#4-40 UNC THD

MKHT – Right-Angle Board-Mount with Blind-Clearance Cut (Male)

MKHT connectors are used in high-temperature applications where a right-angle, plated through-hole termination is desired for mounting. The narrow footprint on this connector helps save board space.

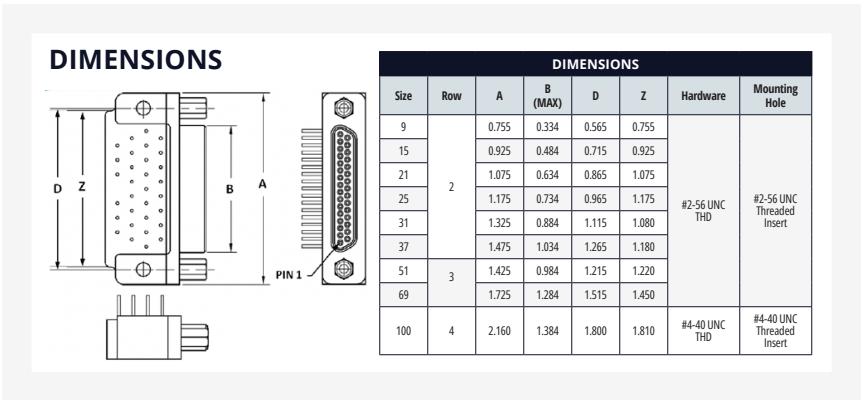

SAMPLE PART NUMBER FORMAT: MKHT-2T2-031-335-220S

MKHT

SERIES
0.050" Rugged Metal PC Board-Mount Connector (Male)

ENTER CODE

ROWS
2 – 2-Row (9-37 contacts)
3 – 3-Row (51 and 69 contacts)
4 – 4-Row (100 contacts)

ENTER CODE

BODY STYLE
T – Plug, right-angle (blind clearance cut), narrow footprint with threaded inserts

ENTER CODE

BODY MATERIAL
2 – High-temp thermoplastic with electroless nickel shell
4 – High-temp thermoplastic with hard black anodized shell
5 – High-temp with stainless steel shell

ENTER CODE

SIZE
009 – 9 Contacts
015 – 15 Contacts
021 – 21 Contacts
025 – 25 Contacts
031 – 31 Contacts
037 – 37 Contacts
051 – 51 Contacts
069 – 69 Contacts
100 – 100 Contacts

ENTER CODE

CONTACT/TERMINATION TYPE
32 – Pin, right-angle, 0.109"
33 – Pin, right-angle, 0.140"
34 – Pin, right-angle, 0.172"

ENTER CODE

PLATING
3 – 50 µm Au contacts; Au terminations


ENTER CODE

HARDWARE
00 – No hardware
22 – Two fixed jacknut assemblies (62)*

ENTER CODE

WIRING
0R – Reversed body polarization
0S – Standard body polarization

MKHT-2T2-031-335-220S

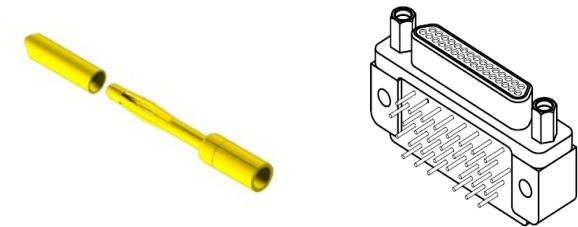

PERFORMANCE	
Contact Rating	3 amperes maximum
Operating Temperature	-55° C to 205° C
Test Voltage	600V, RMS, 60Hz
Insulation Resistance	5,000 megohms minimum at 500 VDC
Durability	500 connector mating cycles
Contact Engaging Force	6.0 oz maximum/contact
Contact Separating Force	0.50 oz minimum/contact
Mating and Un-mating Force	10 oz maximum/contact

HIGH-RELIABILITY CONTACT

MIL-DTL-83513


NOTES

*Number in parentheses to be used when ordering size 100.

MATERIALS AND FINISHES	
Pin Contacts	Copper-based alloy strip
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shells	Aluminum alloy 6061-T6 per SAE AMS-QQ-A-250/11 or 6061-T6S11 per SAE AMS-QQ-A-200/8
Shell Finishes	Electroless nickel per SAE AMS-2402, Class 3, 500 µm minimum or black anodized per MIL-A-8625, Type III Class 2, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Tolerances (unless otherwise specified)	Angles: ±5° Decimals: ±0.010"; Fractions: ±1/64" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"
Note: Molex can manufacture special configurations to your exact specifications.	

MKHT (BLIND-CLEARANCE CUT) MALE DRAWINGS

RIGHT-ANGLE BLIND-CLEARANCE CUT NARROW FOOTPRINT THREADED INSERTS

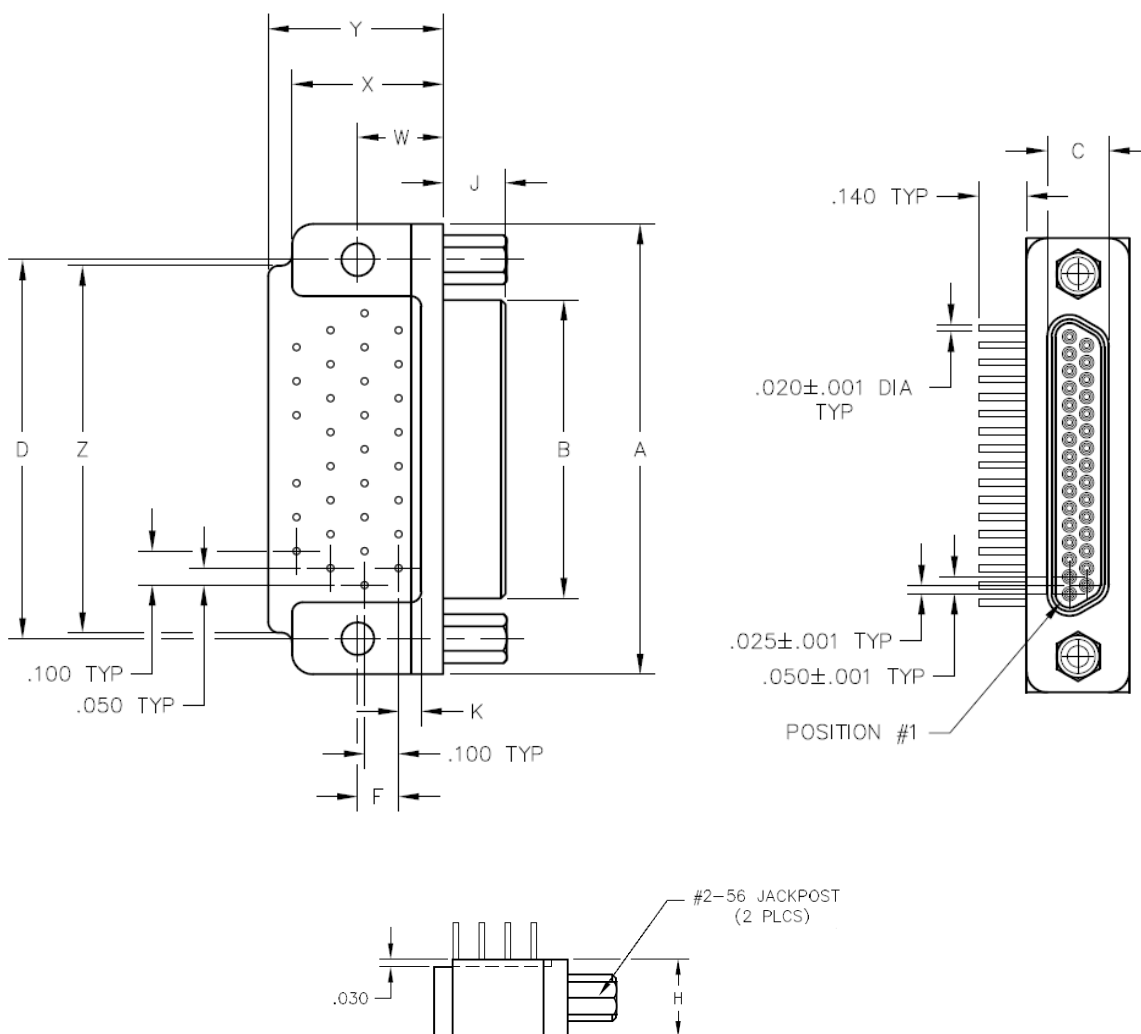


DIMENSIONS														
Size	Row	A	B (MAX)	D	F	H	J	K	W	X (MAX)	Y (MAX)	Z	Hardware	Mounting Hole
9	2	0.755	0.334	0.185	0.020	0.298	0.183	0.067	0.250	0.420	0.420	0.755	#2-56 UNC THD	#2-56 UNC Threaded Insert
15		0.925	0.484		0.120							0.925		
21		1.075	0.634									1.075		
25		1.175	0.734									1.175		
31		1.325	0.884							0.450	0.520	1.080		
37		1.475	1.034		1.180									
51	3	1.425	0.984	0.228	0.150	0.341	0.087	0.300	0.430	0.650	1.220	#2-56 UNC THD	#2-56 UNC Threaded Insert	
69		1.725	1.284							0.755	1450			
100	4	2.160	1.384	0.271	0.200	0.384		0.137	0.400	0.590	1.000	1.810	#4-40 UNC THD	#4-40 UNC Insert

MKHT – Right-Angle Board-Mount with Blind-Clearance Cut (Female)

MKHT connectors are used in high-temperature applications where a right-angle, plated through-hole termination is desired for mounting. The narrow footprint on this connector helps save board space.

DIMENSIONS




DIMENSIONS					
Size	Row	A	B (MAX)	D	Z
9	2	0.755	0.334	0.565	0.755
15		0.925	0.484	0.715	0.925
21		1.075	0.634	0.865	1.075
25		1.175	0.734	0.965	1.175
31		1.325	0.884	1.115	1.080
37		1.475	1.034	1.265	1.180
51	3	1.425	0.984	1.215	1.220
69		1.725	1.284	1.515	1.450
100	4	2.160	1.384	1.800	1.810

SAMPLE PART NUMBER FORMAT: MKHT-2V2-031-445-220S

MKHT	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE
SERIES 0.050" Rugged Metal PC Board-Mount Connector (Female)	ROWS 2 – 2-Row (9-37 contacts) 3 – 3-Row (51 and 69 contacts) 4 – 4-Row (100 contacts)	BODY STYLE V – Receptacle, right-angle (blind clearance cut), narrow footprint with threaded inserts and interfacial seal	BODY MATERIAL 2 – High-temp thermoplastic with electroless nickel shell 4 – High-temp thermoplastic with hard black anodized shell 5 – High-temp with stainless steel shell	SIZE 009 – 9 Contacts 015 – 15 Contacts 021 – 21 Contacts 025 – 25 Contacts 031 – 31 Contacts 037 – 37 Contacts 051 – 51 Contacts 069 – 69 Contacts 100 – 100 Contacts	PLATING 3 – 50 µm Au contacts; Au terminations	HARDWARE 00 – No hardware 22 – Two fixed jacknut assemblies (62)*	WIRING 0R – Reversed body polarization 0S – Standard body polarization	
CONTACT/TERMINATION TYPE 43 – Socket, right-angle, 0.109" x 0.020" dia. 44 – Socket, right-angle, 0.140" x 0.020" dia. 45 – Socket, right-angle, 0.172" x 0.020" dia.								

MKHT-2V2-031-445-220S

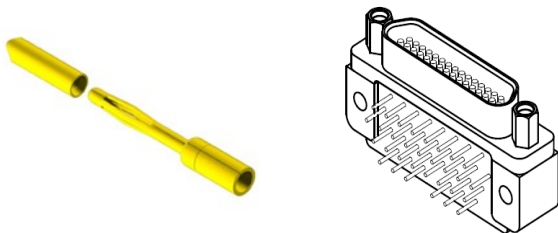

HIGH-RELIABILITY CONTACT

MIL-DTL-83513

NOTES

*Number in parentheses to be used when ordering size 100.

PERFORMANCE


Contact Rating	3 amperes maximum
Operating Temperature	-55° C to 205° C
Test Voltage	600V, RMS, 60Hz
Insulation Resistance	5,000 megohms minimum at 500 VDC
Durability	500 connector mating cycles
Contact Engaging Force	6.0 oz maximum/contact
Contact Separating Force	0.50 oz minimum/contact
Mating and Un-mating Force	10 oz maximum/contact

MATERIALS AND FINISHES

Pin Contacts	Copper-based alloy strip
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shells	Aluminum alloy 6061-T6 per SAE AMS-QQ-A-250/11 or 6061-T6S11 per SAE AMS-QQ-A-200/8
Shell Finishes	Electroless nickel per SAE AMS-2402, Class 3, 500 µm minimum or black anodized per MIL-A-8625, Type III Class 2, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Tolerances (unless otherwise specified)	Angles: ±5° Decimals: ±0.010"; Fractions: ±1/64" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"
Note: Molex can manufacture special configurations to your exact specifications.	

MKHT (BLIND-CLEARANCE CUT) FEMALE DRAWINGS

RIGHT-ANGLE BLIND-CLEARANCE CUT NARROW FOOTPRINT THREADED INSERTS

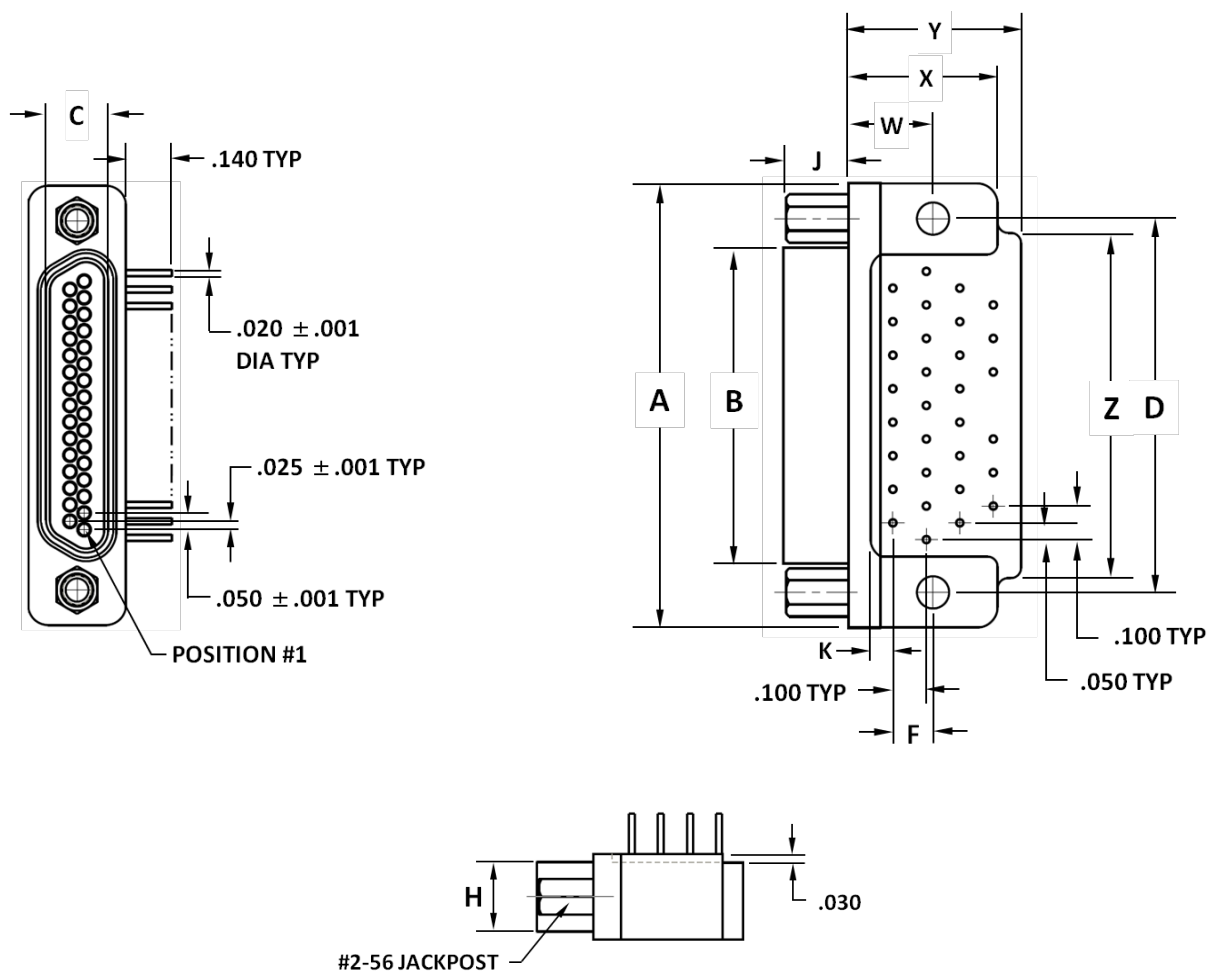


DIMENSIONS																	
Size	Row	A	B (MAX)	C	D	F	H	J	K	W	X (MAX)	Y (MAX)	Z	Hardware	Mounting Hole		
9	2	0.755	0.400	0.251	0.565	0.020	0.298	0.195	0.067	0.250	0.420	0.420	0.755	#2-56 UNC THD	#2-56 UNC Threaded Insert		
15		0.925	0.550		0.715	0.120							0.925				
21		1.075	0.700		0.865								1.075				
25		1.175	0.800		0.965								1.175				
31		1.325	0.950		1.115						1.080						
37		1.475	1.100		1.265						1.180						
51	3	1.425	1.050	0.294	1.215	0.150	0.341		0.087	0.300	0.430	0.650	1.220				
69		1.725	1.350		1.515							0.755	1450				
100	4	2.160	1.508	0.394	1.800	0.200	0.384		0.137	0.400	0.590	1.000	1.810			#4-40 UNC THD	#4-40 UNC Insert

MKHT – Right-Angle Board-Mount with Through-Clearance Cut (Male)

MKHT connectors are used in high-temperature applications where a right-angle, plated through-hole termination is desired for mounting. The narrow footprint on this connector helps save board space.

DIMENSIONS

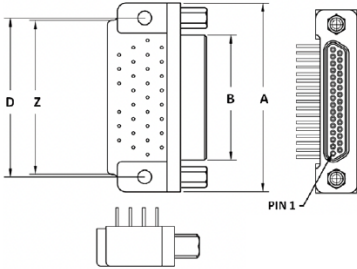

DIMENSIONS						
Size	Row	A	B (MAX)	D	Z	Hardware
9	2	0.755	0.334	0.565	0.755	#2-56 UNC Threaded Insert
15		0.925	0.484	0.715	0.925	
21		1.075	0.634	0.865	1.075	
25		1.175	0.734	0.965	1.175	
31		1.325	0.884	1.115	1.080	
37	3	1.475	1.034	1.265	1.180	
51		1.425	0.984	1.215	1.220	
69		1.725	1.284	1.515	1.450	

SAMPLE PART NUMBER FORMAT: MKHT-2R2-031-335-220S

MKHT

SERIES

0.050" Rugged Metal PC Board- Mount Connector (Male)

ENTER CODE

ROWS

2 – 2-Row (9-37 contacts)
3 – 3-Row (51 and 69 contacts)

ENTER CODE

BODY STYLE

R – Plug, right-angle (44 clearance cut), narrow footprint with threaded insert

ENTER CODE

BODY MATERIAL

2 – High-temp thermoplastic with electroless nickel shell
4 – High-temp thermoplastic with hard black anodized shell
5 – High-temp with stainless steel shell

ENTER CODE

SIZE

009 – 9 Contacts
015 – 15 Contacts
021 – 21 Contacts
025 – 25 Contacts
031 – 31 Contacts
037 – 37 Contacts
051 – 51 Contacts
069 – 69 Contacts

ENTER CODE

CONTACT/TERMINATION TYPE

32 – Pin, right-angle, 0.109"
33 – Pin, right-angle, 0.140"
34 – Pin, right-angle, 0.172" x 0.020" dia.

ENTER CODE

PLATING

3 – 50 µm Au contacts; Au terminations

ENTER CODE

HARDWARE


00 – No hardware
22 – Two fixed jacknut assemblies (62)*

ENTER CODE

WIRING

0S – Standard body polarization

MKHT-2R2-031-335-220S

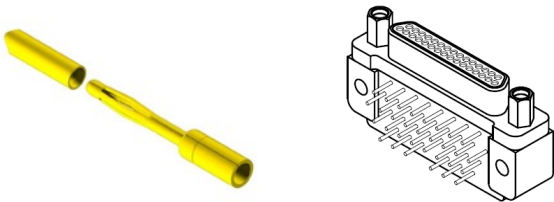

HIGH-RELIABILITY CONTACT

MIL-DTL-83513

NOTES

*Number in parentheses to be used when ordering size 100.

PERFORMANCE


Contact Rating	3 amperes maximum
Operating Temperature	-55° C to 205° C
Test Voltage	600V, RMS, 60Hz
Insulation Resistance	5,000 megohms minimum at 500 VDC
Durability	500 connector mating cycles
Contact Engaging Force	6.0 oz maximum/contact
Contact Separating Force	0.50 oz minimum/contact
Mating and Un-mating Force	10 oz maximum/contact

MATERIALS AND FINISHES

Pin Contacts	Copper-based alloy strip
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shells	Aluminum alloy 6061-T6 per SAE AMS-QQ-A-250/11 or 6061-T6S11 per SAE AMS-QQ-A-200/8
Shell Finishes	Electroless nickel per SAE AMS-2402, Class 3, 500 µm minimum or black anodized per MIL-A-8625, Type III Class 2, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Tolerances (unless otherwise specified)	Angles: ±5° Decimals: ±0.010"; Fractions: ±1/64" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"
Note: Molex can manufacture special configurations to your exact specifications.	

MKHT (THROUGH-CLEARANCE CUT) MALE DRAWINGS

RIGHT- ANGLE THROUGH-CLEARANCE CUT NARROW FOOTPRINT THREADED INSERTS

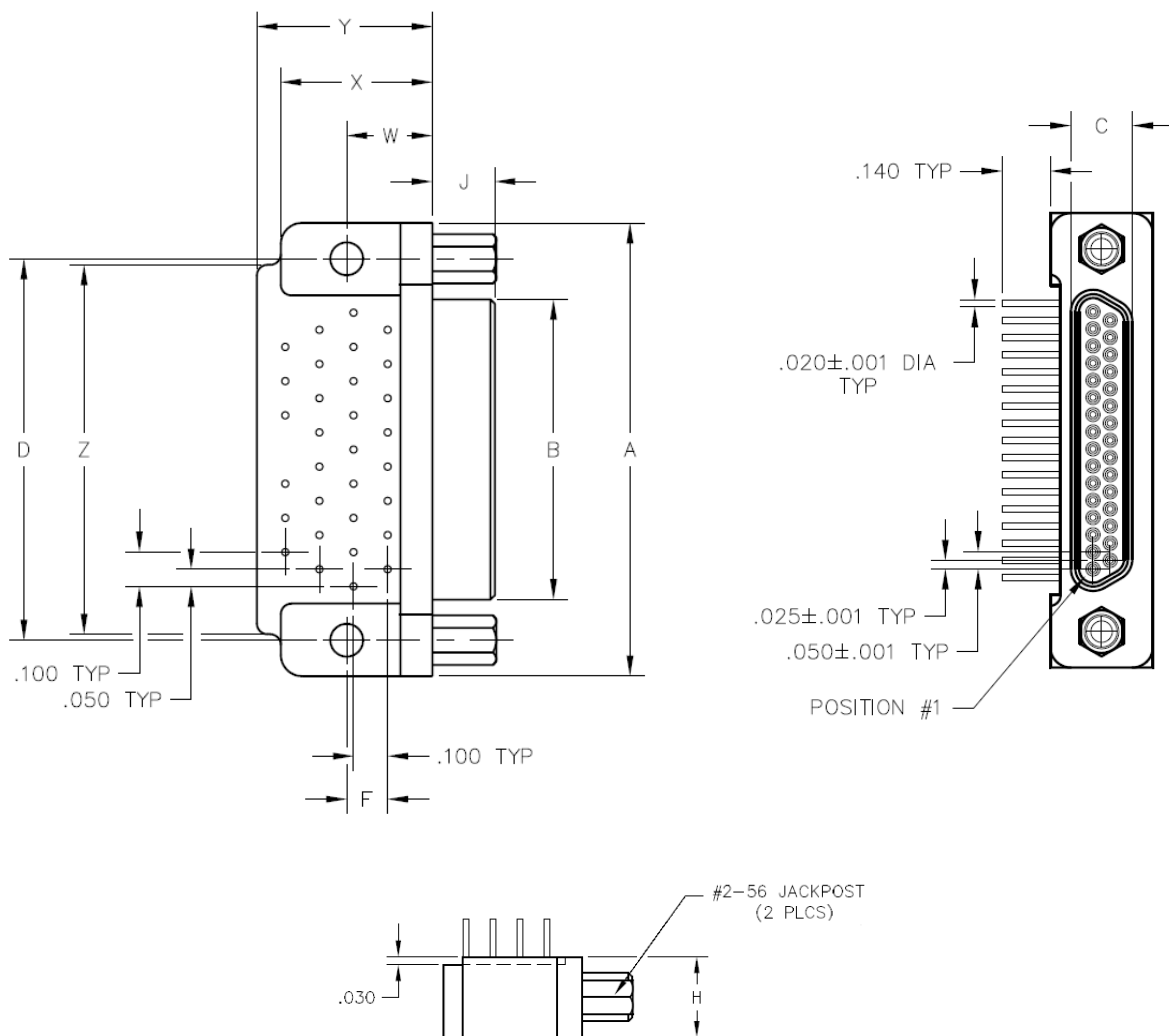


DIMENSIONS

Size	Row	A	B (MAX)	C	D	F	H	J	K	W	X (MAX)	Y (MAX)	Z	Hardware	Mounting Hole
9	2	0.755	0.334	0.185	0.565	0.020	0.298	0.183	0.067	0.250	0.420	0.420	0.755	#2-56 UNC THD	#2-56 UNC Threaded Insert
15		0.925	0.484		0.715	0.120							0.925		
21		1.075	0.634		0.865								1.075		
25		1.175	0.734		0.965								1.175		
31		1.325	0.884		1.115						0.450	0.520	1.080		
37		1.475	1.034		1.265								1.180		
51	3	1.425	0.984	0.228	1.215	0.150	0.341		0.087	0.300	0.430	0.650	1.220		
69		1.725	1.284		1.515							0.755	1450		

MKHT – Right-Angle Board-Mount with Through Clearance Cut (Female)

MKHT connectors are used in high-temperature applications where a right-angle, plated through-hole termination is desired for mounting. The narrow footprint on this connector helps save board space.

DIMENSIONS



DIMENSIONS					
Size	Row	A	B (MAX)	D	Z
9	2	0.755	0.334	0.565	0.755
15		0.925	0.484	0.715	0.925
21		1.075	0.634	0.865	1.075
25		1.175	0.734	0.965	1.175
31		1.325	0.884	1.115	1.080
37		1.475	1.034	1.265	1.180
51	3	1.425	0.984	1.215	1.220
69		1.725	1.284	1.515	1.450

SAMPLE PART NUMBER FORMAT: MKHT-2S2-031-445-220S

MKHT

SERIES

0.050" Rugged Metal PC Board- Mount Connector (Female)

ENTER CODE

ROWS

2 – 2-Row (9-37 contacts)
3 – 3-Row (51 and 69 contacts)

ENTER CODE

BODY STYLE

S – Receptacle, right-angle (thru clearance cut), narrow footprint with threaded inserts and interfacial seal

ENTER CODE

BODY MATERIAL

2 – High-temp thermoplastic with electroless nickel shell
4 – High-temp thermoplastic with hard black anodized shell

ENTER CODE

SIZE

009 – 9 Contacts
015 – 15 Contacts
021 – 21 Contacts
025 – 25 Contacts
031 – 31 Contacts
037 – 37 Contacts

ENTER CODE

CONTACT/TERMINATION TYPE

43 – Socket, right-angle, 0.109" x 0.020" dia.
44 – Socket, right-angle, 0.140" x 0.020" dia.

ENTER CODE

PLATING

3 – 50 µm Au contacts; Au terminations

ENTER CODE

HARDWARE


00 – No hardware
22 – Two fixed jacknut assemblies

ENTER CODE

WIRING

0S – Standard body polarization

MKHT-2S2-031-445-220S

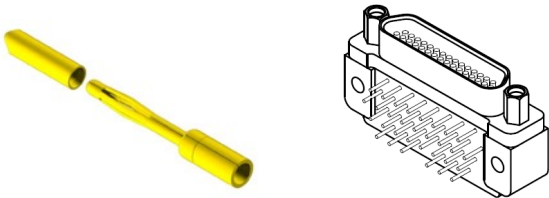

HIGH-RELIABILITY CONTACT


MIL-DTL-83513

PERFORMANCE	
Contact Rating	3 amperes maximum
Operating Temperature	-55° C to 205° C
Test Voltage	600V, RMS, 60Hz
Insulation Resistance	5,000 megohms minimum at 500 VDC
Durability	500 connector mating cycles
Contact Engaging Force	6.0 oz maximum/contact
Contact Separating Force	0.50 oz minimum/contact
Mating and Un-mating Force	10 oz maximum/contact

MATERIALS AND FINISHES	
Pin Contacts	Copper-based alloy strip
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shells	Aluminum alloy 6061-T6 per SAE AMS-QQ-A-250/11or 6061-T6511 per SAE AMS-QQ-A-200/8
Shell Finishes	Electroless nickel per SAE AMS-2402, Class 3, 500 µm minimum or black anodized per MIL-A-8625, Type III Class 2, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Tolerances (unless otherwise specified)	Angles: ±5° Decimals: ±0.010"; Fractions: ±1/64" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"
Note: Molex can manufacture special configurations to your exact specifications.	

MKHT (THROUGH-CLEARANCE CUT) FEMALE DRAWINGS

RIGHT- ANGLE THROUGH-CLEARANCE CUT NARROW FOOTPRINT THREADED INSERTS

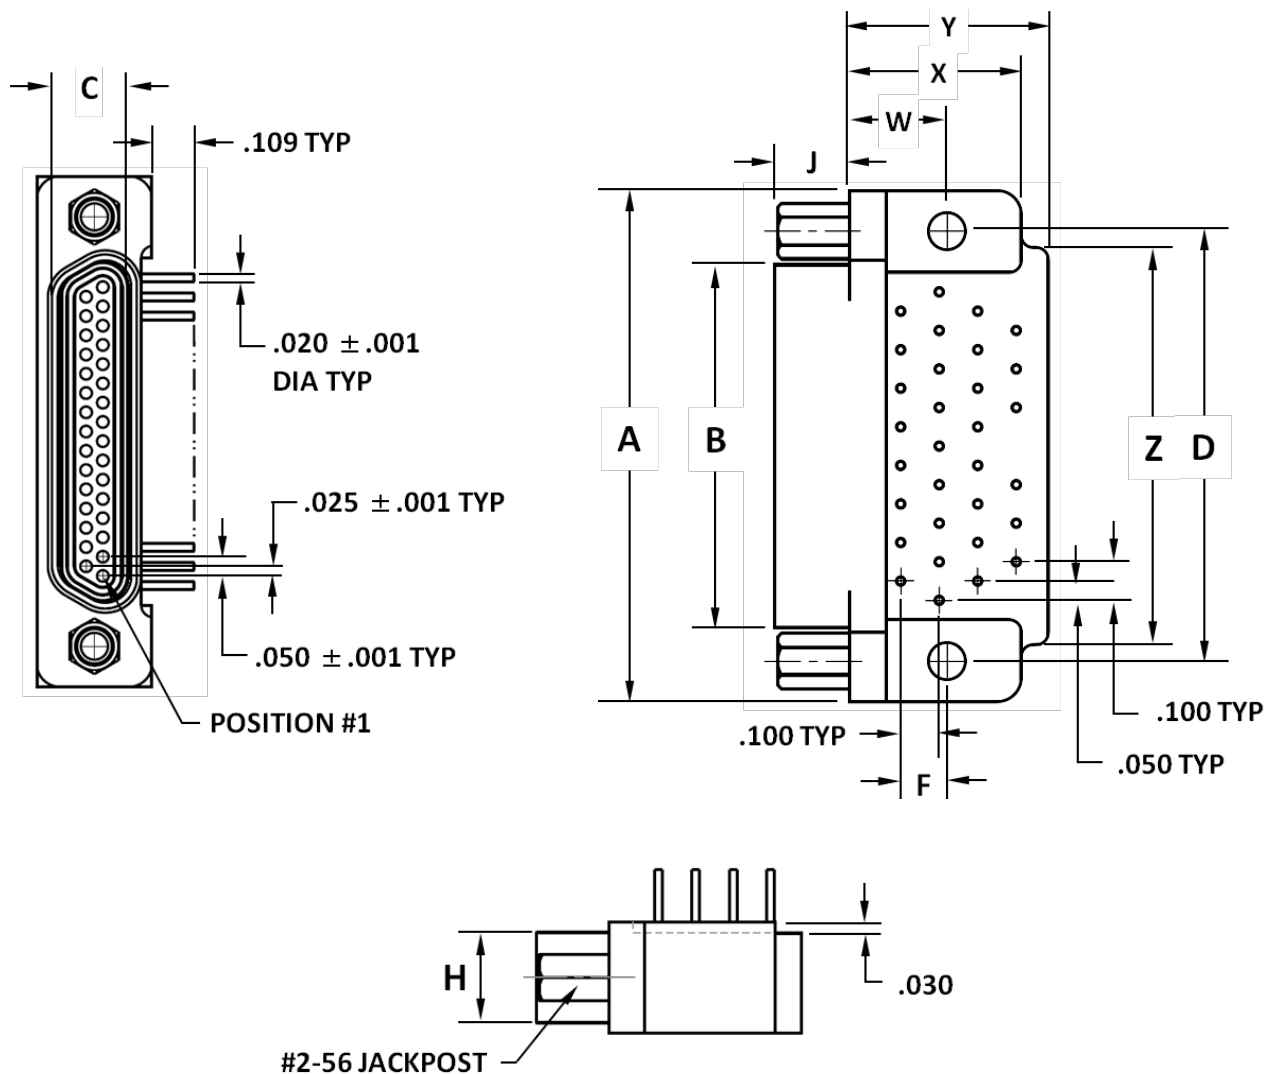


#2-56 JACKPOST

DIMENSIONS






Size	Row	A	B (MAX)	C	D	F	H	J	K	W	X (MAX)	Y (MAX)	Z	Hardware	Mounting Hole
9	2	0.755	0.400	0.251	0.565	0.020	0.298	0.195	0.067	0.250	0.420	0.420	0.755	#2-56 UNC THD	#2-56 UNC Threaded Insert
15		0.925	0.550		0.715	0.120							0.925		
21		1.075	0.700		0.865								1.075		
25		1.175	0.800		0.965								1.175		
31		1.325	0.950		1.115						1.080				
37		1.475	1.100		1.265						0.450	0.520	1.180		
51	3	1.425	1.050	0.294	1.215	0.150	0.341		0.087	0.300	0.430	0.650	1.220		
69		1.725	1.350		1.515							0.755	1450		

**RECOMMENDED PC BOARD LAYOUTS –
MKHT MALE**
RIGHT-ANGLE NARROW FOOTPRINT
STANDARD POLARIZATION SIZES 9–31

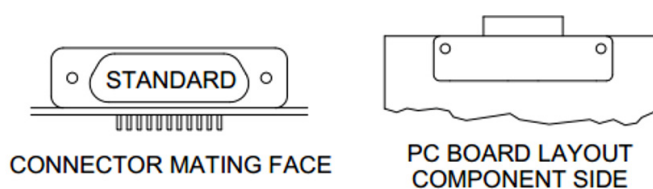


PC BOARD LAYOUT
COMPONENT SIDE


CONNECTOR
MATING FACE

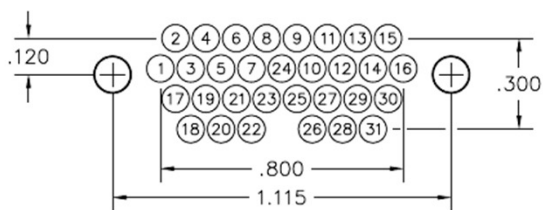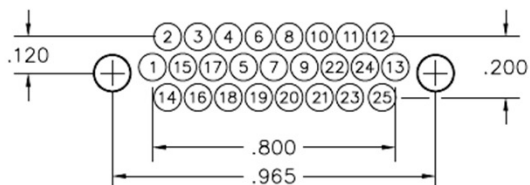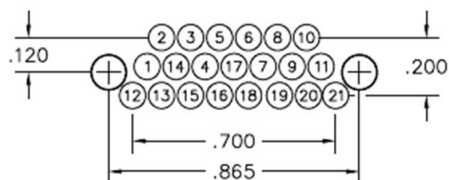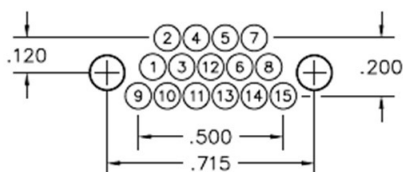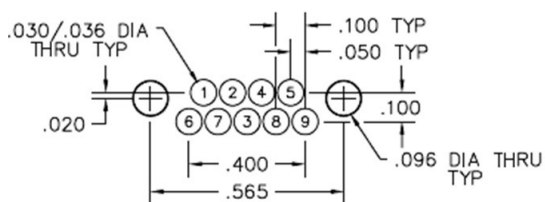





**RECOMMENDED PC BOARD LAYOUTS –
MKHT MALE**
RIGHT-ANGLE NARROW FOOTPRINT
STANDARD POLARIZATION SIZES 37–69

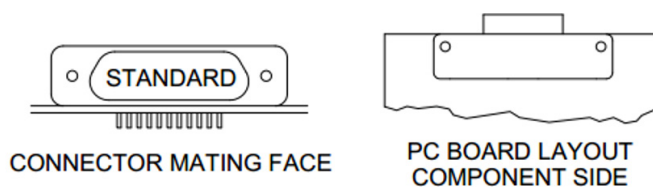




PC BOARD LAYOUT
COMPONENT SIDE

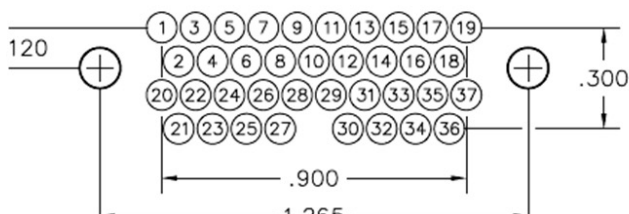

CONNECTOR
MATING FACE

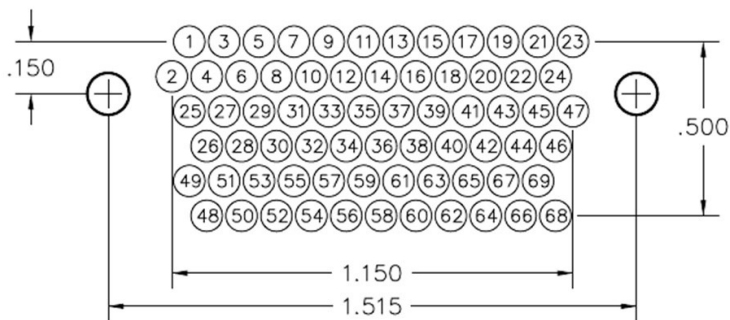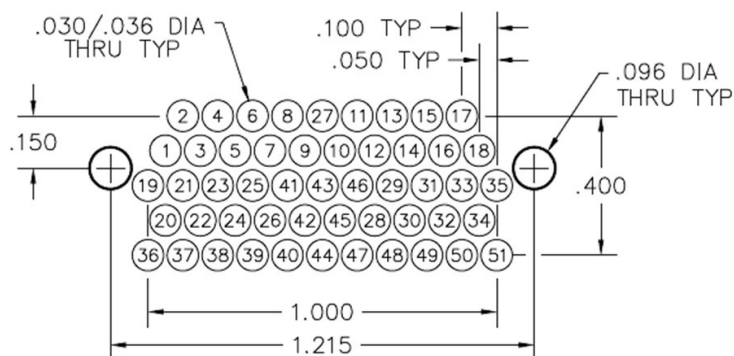


RIGHT-ANGLE NARROW FOOTPRINT STANDARD POLARIZATION SIZES 9-37

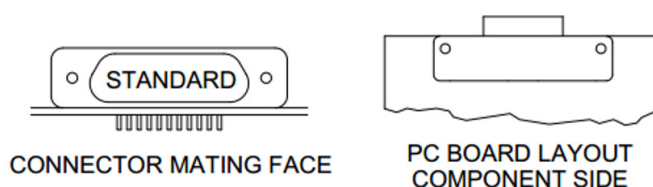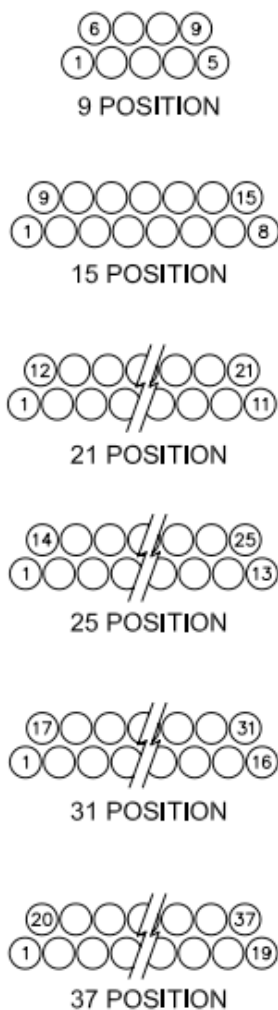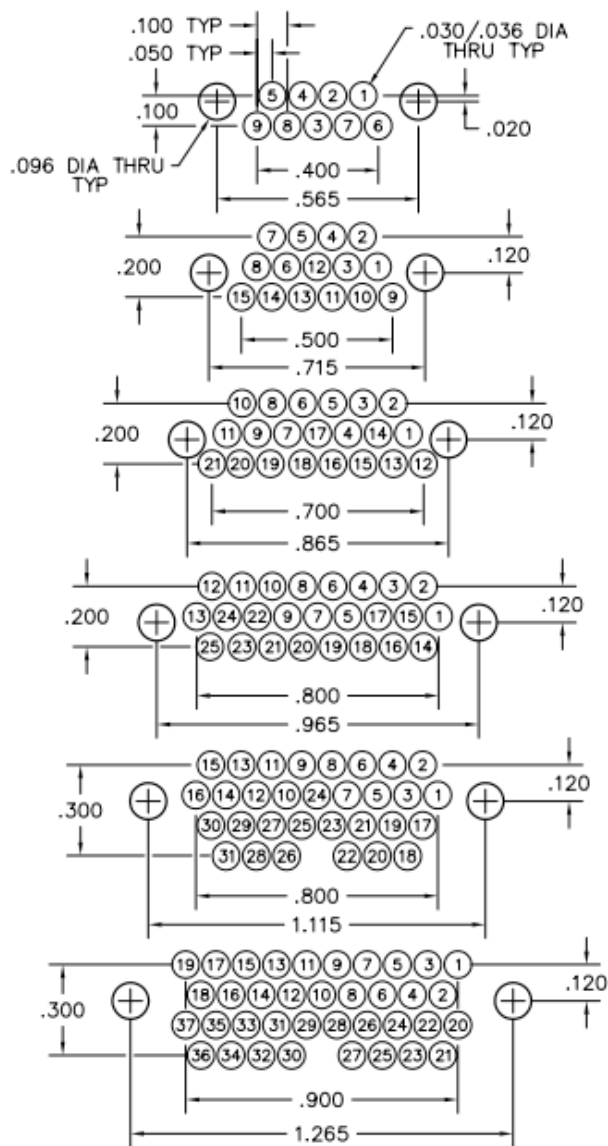CONNECTOR
MATING FACEPC BOARD LAYOUT
COMPONENT SIDE

RECOMMENDED PC BOARD LAYOUTS – MKHT FEMALE

RIGHT-ANGLE NARROW FOOTPRINT

STANDARD POLARIZATION SIZES 51-100


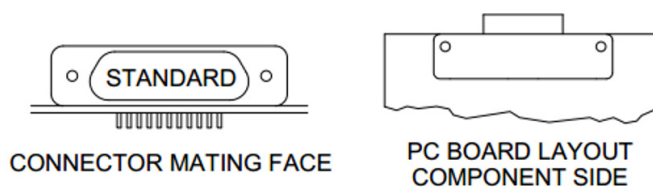


CONNECTOR
MATING FACE





51 POSITION


PC BOARD LAYOUT
COMPONENT SIDE

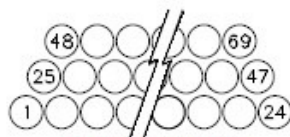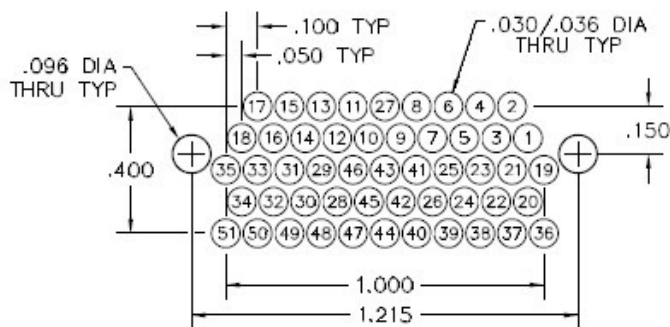

69 POSITION

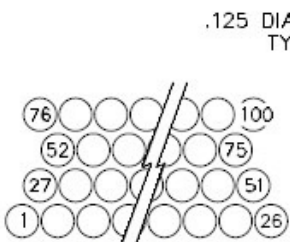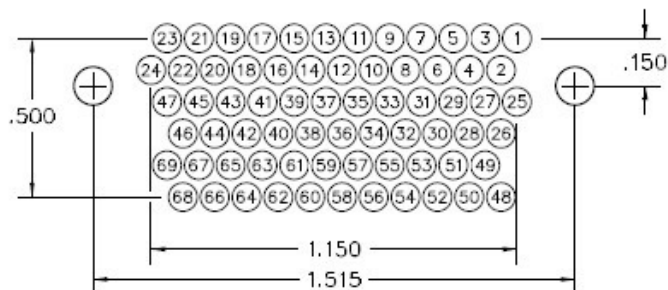


100 POSITION

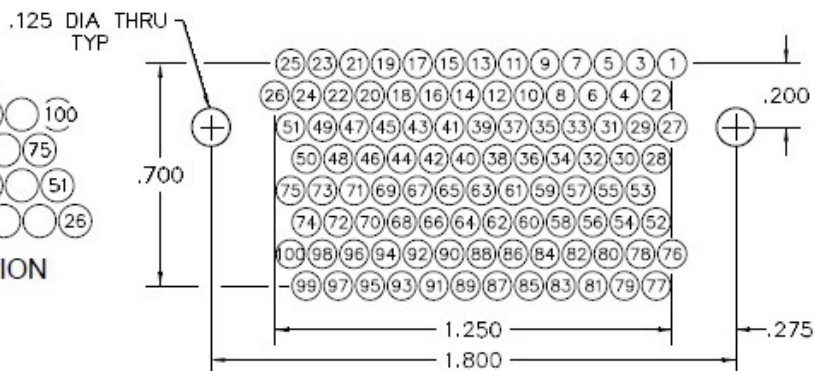

MQHT – Low-Profile I/O Cable (Male)

MQHT connectors are used in high-temperature applications. These low-profile connectors come with a variety of termination, hardware and wiring options. Custom lengths are available on wire termination products.

DIMENSIONS



DIMENSIONS					
Size	Row	A	B (MAX)	C	D
9	2	0.778	0.292	0.398	0.565
15		0.928	0.442	0.548	0.715
21		1.078	0.592	0.698	0.865
25		1.178	0.692	0.798	0.965
31		1.328	0.842	0.948	1.115
37	3	1.478	0.992	1.098	1.265
51		1.428	0.942	1.048	1.215

SAMPLE PART NUMBER FORMAT: MQHT-212-031-161-41WS

MQHT	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE
SERIES 0.050" Low-Profile Metal I/O Connector (Male)	ROWS 2 – 2-Row (9-37 contacts) 3 – 3-Row (51 contacts)	BODY STYLE 1 – Plug	BODY MATERIAL 2 – High-temp thermoplastic with electroless nickel shell 4 – High-temp thermoplastic with hard black anodized shell 5 – High-temp with stainless steel shell	SIZE 009 – 9 Contacts 015 – 15 Contacts 021 – 21 Contacts 025 – 25 Contacts 031 – 31 Contacts 037 – 37 Contacts 051 – 51 Contacts	PLATING 1 – 50 µm Au contacts (crimp wire) 3 – 50 µm Au contacts; Au terminations (solder cup, pigtail)	CONTACT/TERMINATION TYPE 11 – Pin, straight, 26 AWG solder cup 1A – Pin, straight, 24 AWG solder cup 1E – Pin, straight, 0.125" lead length*† 13 – Pin, straight, 0.250" lead length*† 14 – Pin, straight, 0.500" lead length*† 16 – Pin, straight, crimped wire	HARDWARE 00 – No hardware 22 – Two fixed jacknut assemblies 41 – Two turning jackscrews, Allen head, retaining ring 42 – Two long turning jackscrews, Allen head, retaining ring 43 – Two turning jackscrews, slot head, retaining ring 44 – Two long turning jackscrews, slot head, retaining ring 45 – Two turning jackscrews, Allen head, captivated** FF – Float-mount: front panel mounting FR – Float-mount: rear panel mounting	WIRING 00 – None XX – See Wiring Codes

MQHT-212-031-161-41WS



PERFORMANCE

Contact Rating	3 amperes maximum
Operating Temperature	-55° C to 205° C
Test Voltage	600V, RMS, 60Hz
Insulation Resistance	5,000 megohms minimum at 500 VDC
Durability	500 connector mating cycles
Contact Engaging Force	6.0 oz maximum/contact
Contact Separating Force	0.5 oz minimum/contact
Mating and Un-mating Force	10 oz maximum/contact

HIGH-RELIABILITY CONTACT

MIL-DTL-83513

NOTES

*0.018 diameter

**Captivated hardware is factory-installed and non-removable.



†Leads are soft copper, suitable for forming.

MATERIALS AND FINISHES

Pin Contacts	Copper-based alloy strip
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shells	Aluminum alloy 6061-T6 per SAE AMS-QQ-A-250/11 or 6061-T6511 per SAE AMS-QQ-A-200/8
Shell Finishes	Electroless nickel per SAE AMS-2402, Class 3, 500 µm minimum or black anodized per MIL-A-8625, Type III Class 2, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Tolerances (unless otherwise specified)	Angles: ±5° Decimals: ±0.010"; Fractions: ±1/64" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"
Note: Molex can manufacture special configurations to your exact specifications.	

MQHT MALE DRAWINGS

STRAIGHT LOW-PROFILE CABLE-TO-CABLE

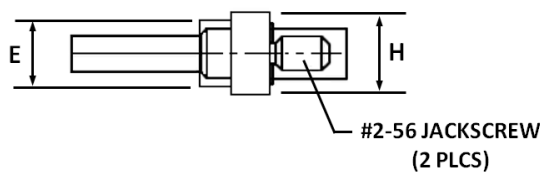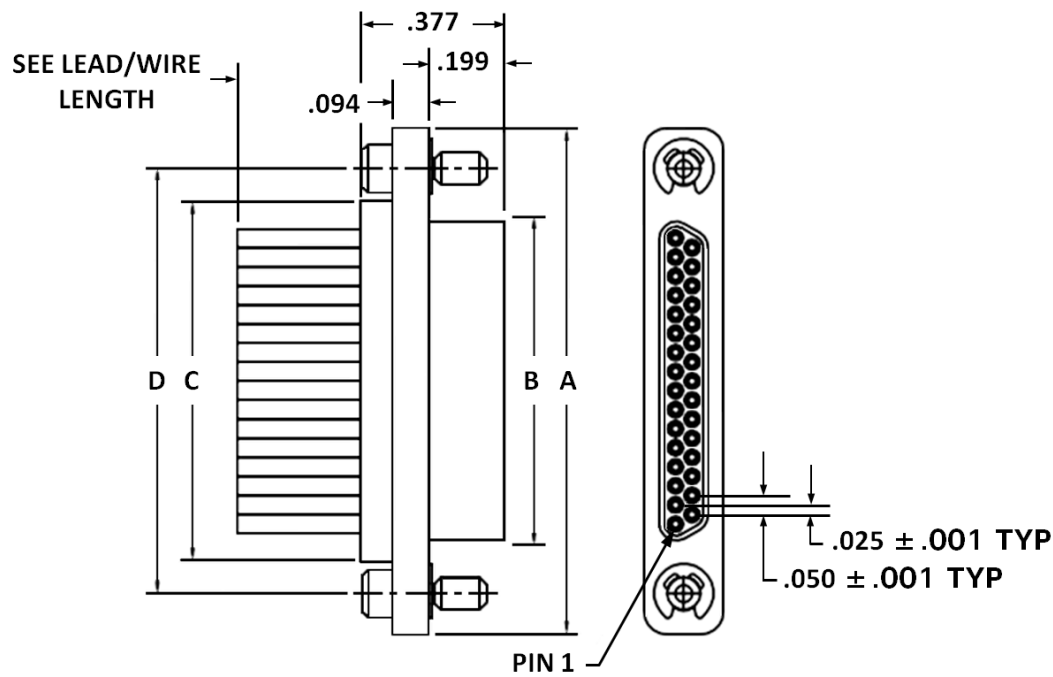


DIMENSIONS								
Size	Row	A	B (MAX)	C	D	E (MAX)	H	Hardware
9	2	0.778	0.292	0.398	0.565	0.173	0.208	#2-56 UNCTHD (0.092 Through)
15		0.928	0.442	0.548	0.715			
21		1.078	0.592	0.698	0.865			
25		1.178	0.692	0.798	0.965			
31		1.328	0.842	0.948	1.115			
37		1.478	0.992	1.098	1.265			
51	3	1.428	0.942	1.048	1.215	0.210	0.250	

MQHT – Low-Profile I/O Cable (Female)

MQHT connectors are used in high-temperature applications. These low-profile connectors come with a variety of termination, hardware and wiring options. Custom lengths are available on wire termination products.

DIMENSIONS




DIMENSIONS					
Size	Row	A	B (MAX)	C	D
9	2	0.778	0.378	0.398	0.565
15		0.928	0.528	0.548	0.715
21		1.078	0.678	0.698	0.865
25		1.178	0.778	0.798	0.965
31		1.328	0.928	0.948	1.115
37	3	1.478	1.078	1.098	1.265
51		1.428	1.028	1.048	1.215

SAMPLE PART NUMBER FORMAT: MQHT-222-031-2A3-2200

MQHT	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE
SERIES 0.050" Low-Profile Metal I/O Connector (Female)	ROWS 2 – 2-Row (9-37 contacts) 3 – 3-Row (51 contacts)	BODY STYLE 2 – Receptacle	BODY MATERIAL 2 – High-temp thermoplastic with electroless nickel shell 4 – High-temp thermoplastic with hard black anodized shell 5 – High-temp with stainless steel shell	SIZE 009 – 9 Contacts 015 – 15 Contacts 021 – 21 Contacts 025 – 25 Contacts 031 – 31 Contacts 037 – 37 Contacts 051 – 51 Contacts	PLATING 1 – 50 µm Au contacts (crimp wire) 3 – 50 µm Au contacts; Au terminations (solder cup, pigtail)	CONTACT/TERMINATION TYPE 21 – Socket, straight, 26 AWG solder cup 2A – Socket, straight, 24 AWG solder cup 2E – Socket, straight, 0.125" lead length* 23 – Socket, straight, 0.250" lead length* 24 – Socket, straight, 0.500" lead length*† 26 – Socket, straight, crimped wire	HARDWARE 00 – No hardware 22 – Two fixed jacknut assemblies 41 – Two turning jackscrews, Allen head, retaining ring 42 – Two long turning jackscrews, Allen head, retaining ring 43 – Two turning jackscrews, slot head, retaining ring 44 – Two long turning jackscrews, slot head, retaining ring 45 – Two turning jackscrews, Allen head, captivated** FF – Float-mount: front panel mounting FR – Float-mount: rear panel mounting	WIRING 00 – None XX – See Wiring Codes

MQHT-222-031-2A3-2200

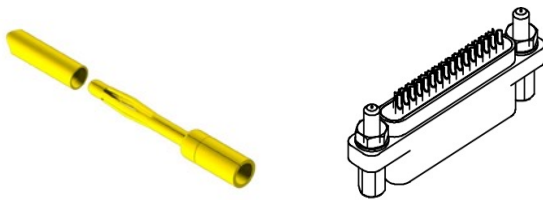

HIGH-RELIABILITY CONTACT

MIL-DTL-83513

NOTES

*0.018 diameter

**Captivated hardware is factory-installed and non-removable.

†Leads are soft copper, suitable for forming.

PERFORMANCE

Contact Rating	3 amperes maximum
Operating Temperature	-55° C to 205° C
Test Voltage	600V, RMS, 60Hz
Insulation Resistance	5,000 megohms minimum at 500 VDC
Durability	500 connector mating cycles
Contact Engaging Force	6.0 oz maximum/contact
Contact Separating Force	0.5 oz minimum/contact
Mating and Un-mating Force	10 oz maximum/contact

MATERIALS AND FINISHES


Socket Contact	Brass per ASTM B121/B121M or ASTM B16/B16M or ASTM B453
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shells	Aluminum alloy 6061-T6 per SAE AMS-QQ-A-250/11 or 6061-T6511 per SAE AMS-QQ-A-200/8
Shell Finishes	Electroless nickel per SAE AMS-2402, Class 3, 500 µm minimum or black anodized per MIL-A-8625, Type III Class 2, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Interfacial Seal Gaskets	Fluorosilicone per SAE AMS-R-25988
Tolerances (unless otherwise specified)	Angles: ±5° Decimals: ±0.010"; Fractions: ±1/64" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"

Note: Molex can manufacture special configurations to your exact specifications.

molex

MQHT FEMALE DRAWINGS

STRAIGHT LOW-PROFILE CABLE-TO-CABLE


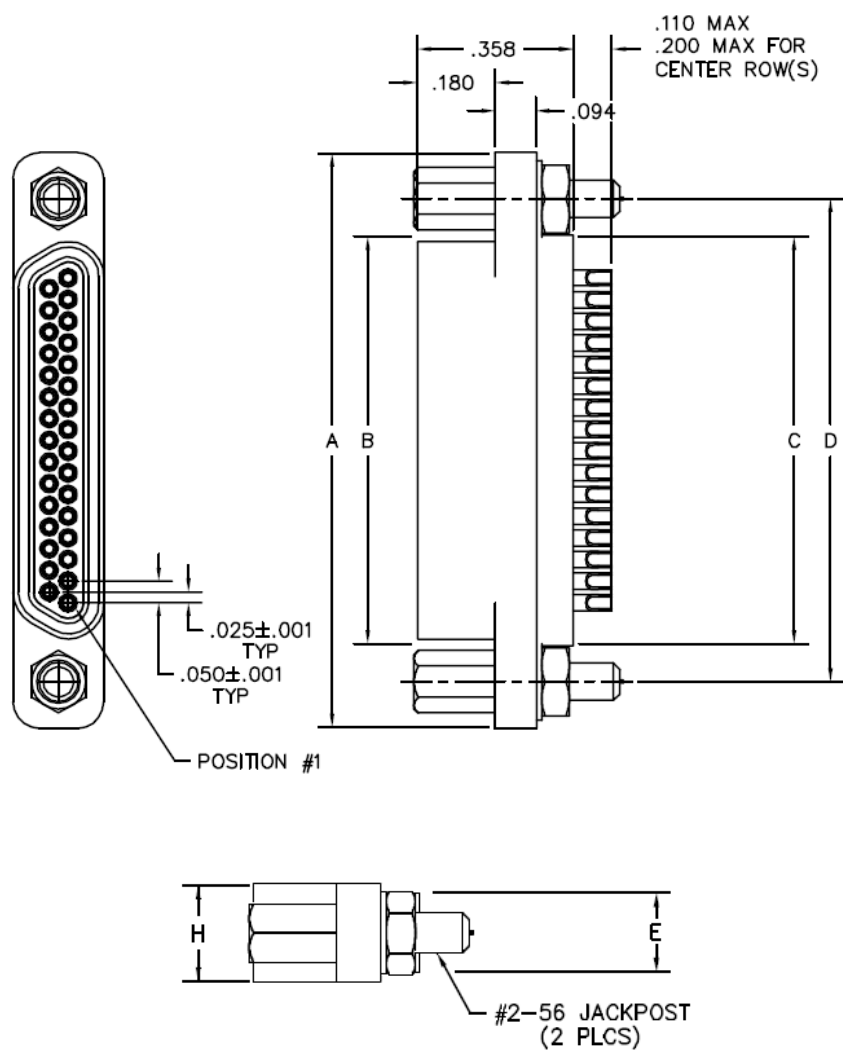


DIMENSIONS								
Size	Row	A	B (MAX)	C	D	E (MAX)	H	Hardware
9	2	0.778	0.378	0.398	0.565	0.173	0.208	#2-56 UNCTHD (0.092 Through)
15		0.928	0.528	0.548	0.715			
21		1.078	0.678	0.698	0.865			
25		1.178	0.778	0.798	0.965			
31		1.328	0.928	0.948	1.115			
37		1.478	1.078	1.098	1.265			
51	3	1.428	1.028	1.048	1.215	0.210	0.250	

MSHT – Low-Profile, Right-Angle Board-Mount (Male)

MSHT connectors are used in high-temperature applications where a right-angle, plated through-hole termination is desired for mounting. The narrow footprint on this connector helps save board space.

DIMENSIONS



DIMENSIONS					
Size	Row	A	B (MAX)	D	Z
9	2	0.778	0.292	0.565	0.775
15		0.928	0.442	0.715	0.925
21		1.078	0.592	0.865	1.075
25		1.178	0.692	0.965	1.175
31		1.328	0.842	1.115	1.080
37		1.478	0.992	1.265	1.180
51	3	1.428	0.942	1.215	1.220

SAMPLE PART NUMBER FORMAT: MSHT-252-037-323-220S

MSHT

ENTER CODE

ENTER CODE

ENTER CODE

ENTER CODE

ENTER CODE

ENTER CODE

ENTER CODE

ENTER CODE

SERIES
0.050" Low-Profile Metal PC Board-Mount Connector (Male)

ROWS
2 – 2-Row (9-37 contacts)
3 – 3-Row (51 contacts)

BODY STYLE
5 – Plug, right-angle, narrow footprint with threaded

BODY MATERIAL
2 – High-temp thermoplastic with electroless nickel shell
4 – High-temp thermoplastic with hard black anodized shell
5 – High-temp with stainless steel shell

SIZE
009 – 9 Contacts
015 – 15 Contacts
021 – 21 Contacts
025 – 25 Contacts
031 – 31 Contacts
037 – 37 Contacts
051 – 51 Contacts


PLATING
3 – 50 µm Au contacts; Au terminations

HARDWARE
00 – No hardware
22 – Two fixed jacknut assemblies

WIRING
0S – Standard body polarization

CONTACT/TERMINATION TYPE
32 – Pin, right-angle, 0.109" x 0.020" dia.
33 – Pin, right-angle, 0.140" x 0.020" dia.
34 – Pin, right-angle, 0.172" x 0.020" dia.

MSHT-252-037-323-220S

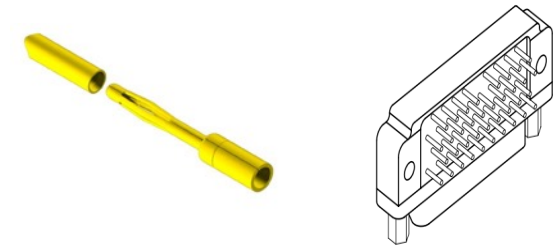


HIGH-RELIABILITY CONTACT MIL-DTL-83513

PERFORMANCE	
Contact Rating	3 amperes maximum
Operating Temperature	-55° C to 205° C
Test Voltage	600V, RMS, 60Hz
Insulation Resistance	5,000 megohms minimum at 500 VDC
Durability	500 connector mating cycles
Contact Engaging Force	6.0 oz maximum/contact
Contact Separating Force	0.5 oz minimum/contact
Mating and Un-mating Force	10 oz maximum/contact

MATERIALS AND FINISHES	
Pin Contacts	Copper-based alloy strip
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shells	Aluminum alloy 6061-T6 per SAE AMS-QQ-A-250/11 or 6061-T6S11 per SAE AMS-QQ-A-200/8
Shell Finishes	Electroless nickel per SAE AMS-2402, Class 3, 500 µm minimum or black anodized per MIL-A-8625, Type III Class 2, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Tolerances (unless otherwise specified)	Angles: ±5° Decimals: ±0.010"; Fractions: ±1/64" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"
Note: Molex can manufacture special configurations to your exact specifications.	

MSHT MALE DRAWINGS
RIGHT-ANGLE NARROW FOOTPRINT THREADED INSERTS


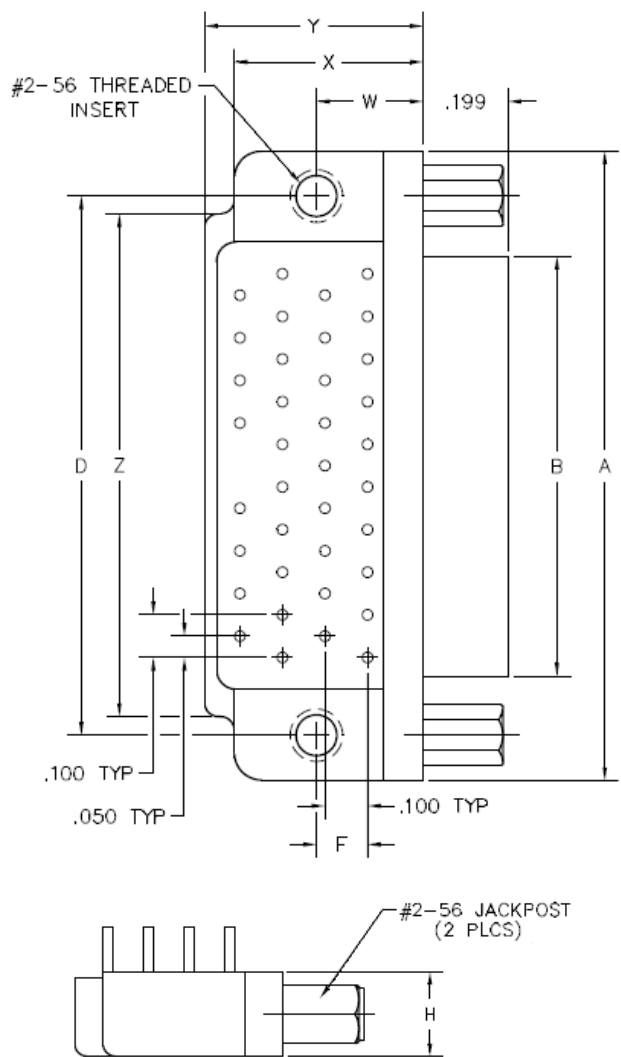


DIMENSIONS										
Size	Row	A	B (MAX)	D	F	H	W	X (MAX)	Z	Hardware
9	2	0.778	0.292	0.565	0.020	0.208	0.250	0.420	0.775	#2-56 UNC THD
15		0.928	0.442	0.715	0.120				0.925	
21		1.078	0.592	0.865					1.075	
25		1.178	0.692	0.965					1.175	
31		1.328	0.842	1.115				0.450	1.080	
37		1.478	0.992	1.265					1.180	
51	3	1.428	0.942	1.215	0.150	0.250	0.300	0.425	1.220	

MSHT – Low-Profile, Right-Angle Board-Mount (Female)

MSHT connectors are used in high-temperature applications where a right-angle, plated through-hole termination is desired for mounting. The narrow footprint on this connector helps save board space.

DIMENSIONS




DIMENSIONS						
Size	Row	A	B (MAX)	D	Z	Hardware
9	2	0.778	0.378	0.565	0.775	#2-56 UNCTHD
15		0.928	0.528	0.715	0.925	
21		1.078	0.678	0.865	1.075	
25		1.178	0.778	0.965	1.175	
31		1.328	0.928	1.115	1.080	
37	3	1.478	1.078	1.265	1.180	
51		1.428	1.028	1.215	1.220	

SAMPLE PART NUMBER FORMAT: MSHT-262-037-433-220S

MSHT	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE
SERIES 0.050" Low-Profile Metal PC Board-Mount Connector (Female)	ROWS 2 – 2-Row (9-37 contacts) 3 – 3-Row (51 contacts)	BODY STYLE 6 – Receptacle, right-angle, narrow footprint with threaded inserts and interfacial seal.	BODY MATERIAL 2 – High-temp thermoplastic with electroless nickel shell 4 – High-temp thermoplastic with hard black anodized shell 5 – High-temp with stainless steel shell	SIZE 009 – 9 Contacts 015 – 15 Contacts 021 – 21 Contacts 025 – 25 Contacts 031 – 31 Contacts 037 – 37 Contacts 051 – 51 Contacts	CONTACT/TERMINATION TYPE 43 – Socket, right-angle, 0.109" x 0.020" dia. 44 – Socket, right-angle, 0.140" x 0.020" dia. 45 – Socket, right-angle, 0.172" x 0.020" dia.	PLATING 3 – 50 µm Au contacts; Au terminations	HARDWARE 00 – No hardware 22 – Two fixed jacknut assemblies	WIRING 0S – Standard body polarization

MSHT-262-037-433-220S



HIGH-RELIABILITY CONTACT

MIL-DTL-83513

PERFORMANCE

Contact Rating	3 amperes maximum
Operating Temperature	-55° C to 205° C
Test Voltage	600V, RMS, 60Hz
Insulation Resistance	5,000 megohms minimum at 500 VDC
Durability	500 connector mating cycles
Contact Engaging Force	6.0 oz maximum/contact
Contact Separating Force	0.5 oz minimum/contact
Mating and Un-mating Force	10 oz maximum/contact


MATERIALS AND FINISHES

Socket Contact	Brass per ASTM B121/B121M or ASTM B16/B16M or ASTM B453
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shells	Aluminum alloy 6061-T6 per SAE AMS-QQ-A-250/11 or 6061-T6S11 per SAE AMS-QQ-A-200/8
Shell Finishes	Electroless nickel per SAE AMS-2402, Class 3, 500 µm minimum or black anodized per MIL-A-8625, Type III Class 2, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Interfacial Seal Gaskets	Fluorosilicone per SAE AMS-R-25988
Tolerances (unless otherwise specified)	Angles: ±5° Decimals: ±0.010"; Fractions: ±1/64" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"

Note: Molex can manufacture special configurations to your exact specifications.

MSHT FEMALE DRAWINGS

RIGHT-ANGLE BLIND-CLEARANCE CUT NARROW FOOTPRINT THREADED INSERTS

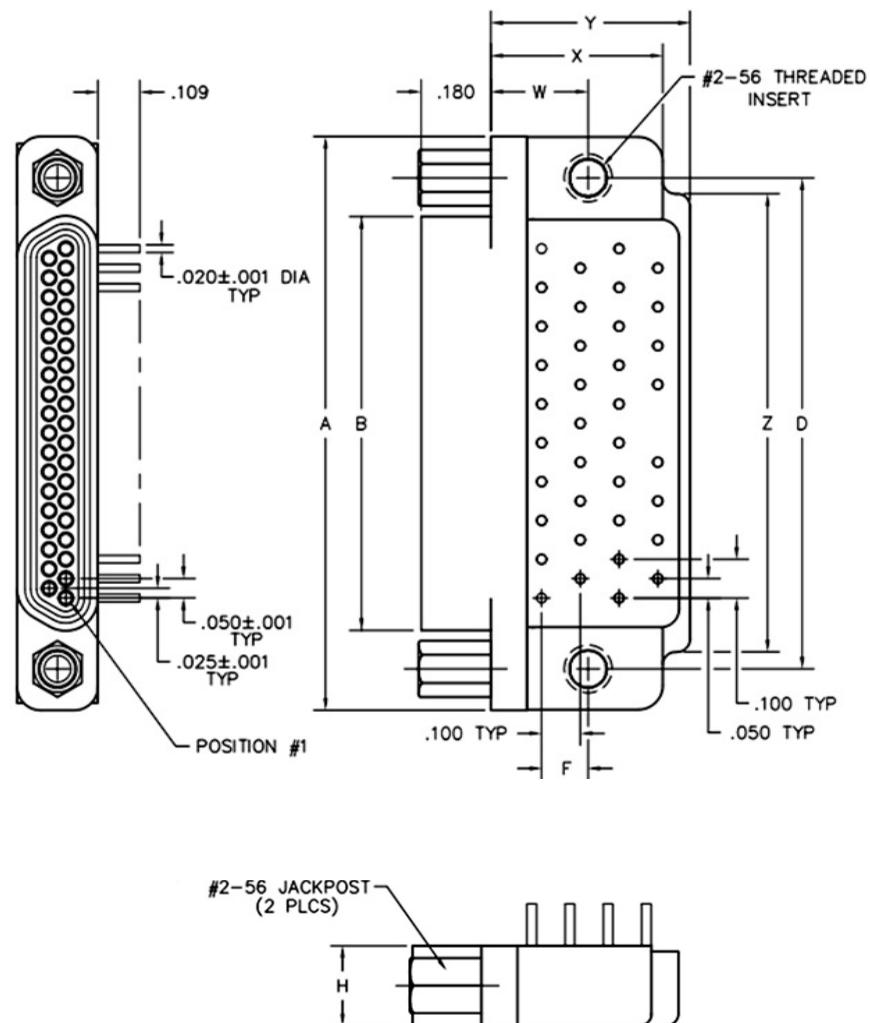


DIMENSIONS

Size	Row	A	B (MAX)	C	D	F	H	J	K	W	X (MAX)	Y (MAX)	Z	Hardware	Mounting Hole
9	2	0.758	0.378	0.218	0.565	0.020	0.208	0.180	0.067	0.250	0.420	0.420	0.755	#2-56 UNC THD	#2-56 UNC Threaded Insert
15		0.928	0.528		0.715	0.120							0.925		
21		1.078	0.678		0.865								1.075		
25		1.178	0.778		0.965								1.175		
31		1.328	0.928		1.115						0.450	0.520	1.080		
37		1.478	1.078		1.265								1.180		
51	3	1.428	1.028	0.260	1.215	0.150	0.250	0.087	0.300	0.425	0.650	1.220			

MSHT – Right-Angle Board-Mount with Blind-Clearance Cut (Male)

MSHT connectors are used in high-temperature applications where a right-angle, plated through-hole termination is desired for mounting. The narrow footprint on this connector can help save board space.

DIMENSIONS



DIMENSIONS						
Size	Row	A	B (MAX)	D	Z	Hardware
9	2	0.758	0.292	0.565	0.775	#2-56 UNC THD Threaded Insert
15		0.928	0.442	0.715	0.925	
21		1.078	0.592	0.865	1.075	
25		1.178	0.692	0.965	1.175	
31		1.328	0.842	1.115	1.080	
37	3	1.478	0.992	1.265	1.180	
51		1.428	0.942	1.215	1.220	

SAMPLE PART NUMBER FORMAT: MSHT-2T3-037-323-220S

MSHT

ENTER CODE

ENTER CODE

ENTER CODE

ENTER CODE

ENTER CODE

ENTER CODE

ENTER CODE

ENTER CODE

SERIES
0.050" Low-Profile Metal PC Board-Mount Connector (Male)

ROWS
2 – 2-Row (9-37 contacts)
3 – 3-Row (51 contacts)

BODY STYLE
T – Plug, right angle (blind clearance cut), narrow footprint with threaded inserts

BODY MATERIAL
2 – High-temp thermoplastic with electroless nickel shell
4 – High-temp thermoplastic with hard black anodized shell

SIZE
009 – 9 Contacts
015 – 15 Contacts
021 – 21 Contacts
025 – 25 Contacts
031 – 31 Contacts
037 – 37 Contacts
051 – 51 Contacts


PLATING
3 – 50 µm Au contacts; Au terminations

HARDWARE
00 – No hardware
22 – Two fixed jacknut assemblies

WIRING
0S – Standard body polarization

CONTACT/TERMINATION TYPE
32 – Pin, right-angle, PCB leads, 0.109" x 0.020" dia.
33 – Pin, right-angle, PCB leads, 0.140" x 0.020" dia.
34 – Pin, right-angle, PCB leads, 0.172" x 0.020" dia.

MSHT-2T3-037-323-220S

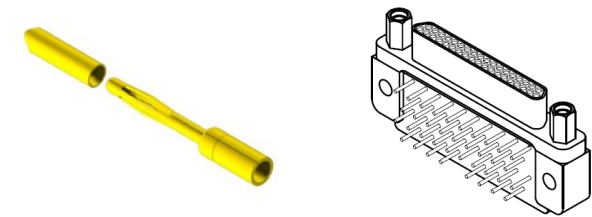


HIGH-RELIABILITY CONTACT MIL-DTL-83513

PERFORMANCE	
Contact Rating	3 amperes maximum
Operating Temperature	-55° C to 205° C
Test Voltage	600V, RMS, 60Hz
Insulation Resistance	5,000 megohms minimum at 500 VDC
Durability	500 connector mating cycles
Contact Engaging Force	6.0 oz maximum/contact
Contact Separating Force	0.5 oz minimum/contact
Mating and Un-mating Force	10 oz maximum/contact

MATERIALS AND FINISHES	
Pin Contacts	Copper-based alloy strip
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shells	Aluminum alloy 6061-T6 per SAE AMS-QQ-A-250/11 or 6061-T6511 per SAE AMS-QQ-A-200/8
Shell Finishes	Electroless nickel per SAE AMS-2402, Class 3, 500 µm minimum or black anodized per MIL-A-8625, Type III Class 2, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Tolerances (unless otherwise specified)	Angles: ±5° Decimals: ±0.010"; Fractions: ±1/64" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"
Note: Molex can manufacture special configurations to your exact specifications.	

MSHT MALE DRAWINGS

RIGHT-ANGLE BLIND-CLEARANCE CUT NARROW FOOTPRINT THREADED INSERTS

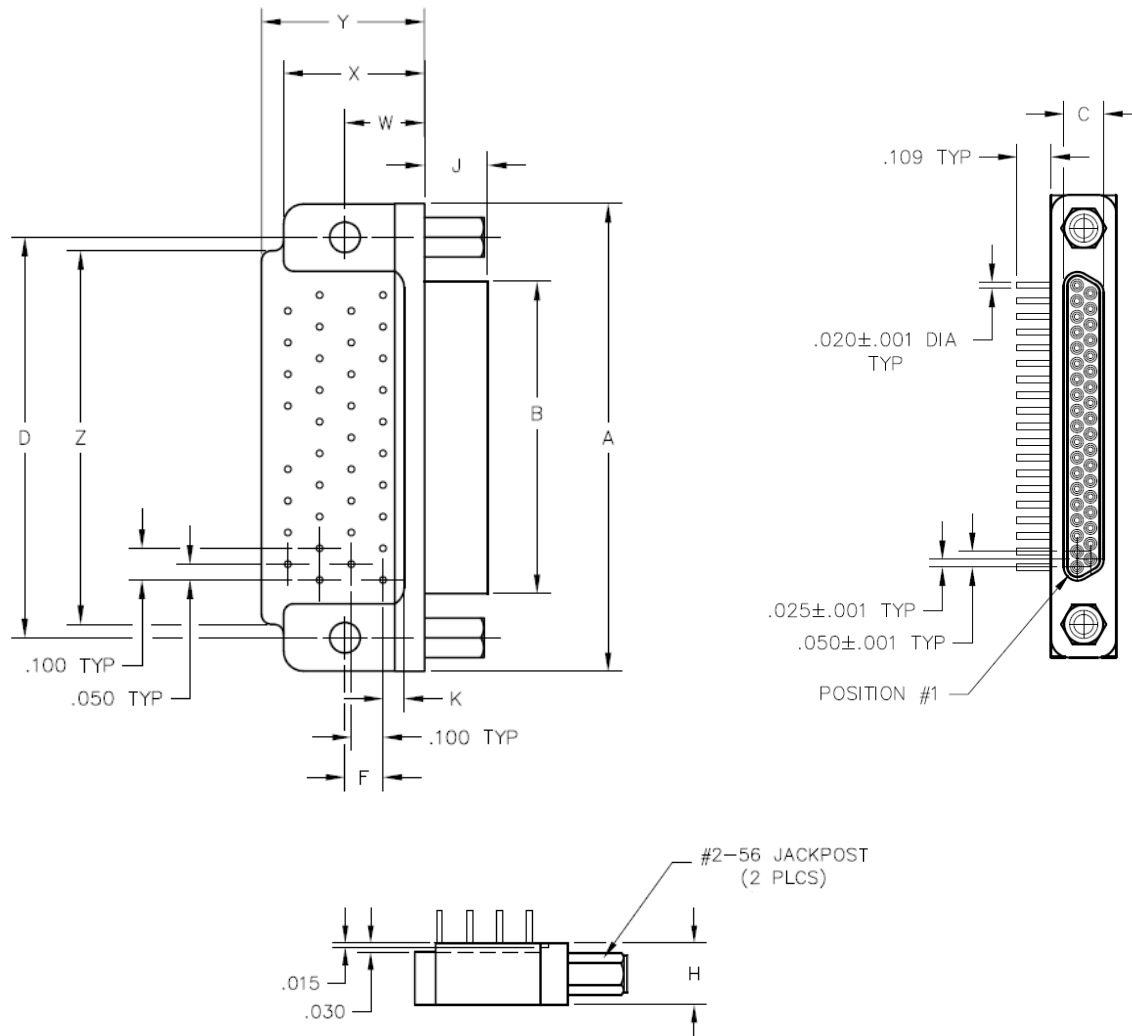


DIMENSIONS

Size	Row	A	B (MAX)	C	D	F	H	J	K	W	X (MAX)	Y (MAX)	Z	Hardware	Mounting Hole
9	2	0.758	0.292	0.134	0.565	0.020	0.208	0.199	0.067	0.250	0.420	0.420	0.755	#2-56 UNC THD	#2-56 UNC Threaded Insert
15		0.928	0.442		0.715	0.120							0.925		
21		1.078	0.592		0.865								1.075		
25		1.178	0.692		0.965								1.175		
31		1.328	0.842		1.115						0.450	0.520	1.080		
37		1.478	0.992		1.265								1.180		
51	3	1.428	0.942	0.177	1.215	0.150	0.250	0.087	0.300	0.425	0.650	1.220			

MSHT – Right-Angle Board-Mount with Blind-Clearance Cut (Female)

MSHT connectors are used in high-temperature applications where a right-angle, plated through-hole termination is desired for mounting. The narrow footprint on this connector can help save board space.

DIMENSIONS



DIMENSIONS					
Size	Row	A	B (MAX)	D	Z
9	2	0.758	0.378	0.565	0.775
15		0.928	0.528	0.715	0.925
21		1.078	0.678	0.865	1.075
25		1.178	0.778	0.965	1.175
31		1.328	0.928	1.115	1.080
37		1.478	1.078	1.265	1.180
51	3	1.428	1.028	1.215	1.220

SAMPLE PART NUMBER FORMAT: MSHT-2V3-037-435-220S

MSHT

ENTER CODE

ENTER CODE

ENTER CODE

ENTER CODE

ENTER CODE

ENTER CODE

ENTER CODE

ENTER CODE

SERIES
0.050" Low-Profile Metal PC Board-Mount Connector (Female)

ROWS
2 – 2-Row (9-37 contacts)
3 – 3-Row (51 contacts)

BODY STYLE
V – Receptacle, right-angle (blind clearance cut), narrow footprint with threaded inserts

BODY MATERIAL
2 – High-temp thermoplastic with electroless nickel shell
4 – High-temp thermoplastic with hard black anodized shell

SIZE
009 – 9 Contacts
015 – 15 Contacts
021 – 21 Contacts
025 – 25 Contacts
031 – 31 Contacts
037 – 37 Contacts
051 – 51 Contacts


PLATING
3 – 50 µm Au contacts; Au terminations

HARDWARE
00 – No hardware
22 – Two fixed jacknut assemblies

WIRING
0S – Standard body polarization

CONTACT/TERMINATION TYPE
43 – Socket, right-angle, 0.109" x 0.020" dia
44 – Socket, right-angle, 0.140" x 0.020" dia
45 – Socket, right-angle, 0.172" x 0.020" dia

MSHT-2V3-037-435-220S

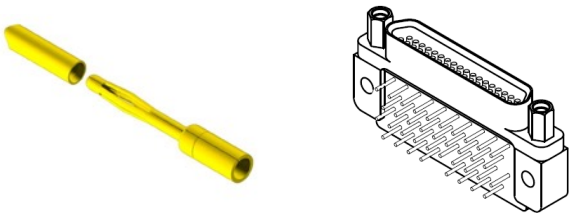


HIGH-RELIABILITY CONTACT MIL-DTL-83513

PERFORMANCE	
Contact Rating	3 amperes maximum
Operating Temperature	-55° C to 205° C
Test Voltage	600V, RMS, 60Hz
Insulation Resistance	5,000 megohms minimum at 500 VDC
Durability	500 connector mating cycles
Contact Engaging Force	6.0 oz maximum/contact
Contact Separating Force	0.5 oz minimum/contact
Mating and Un-mating Force	10 oz maximum/contact


MATERIALS AND FINISHES	
Socket Contact	Brass per ASTM B121/B121M or ASTM B16/B16M or ASTM B453
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shells	Aluminum alloy 6061-T6 per SAE AMS-QQ-A-250/11 or 6061-T6S11 per SAE AMS-QQ-A-200/8
Shell Finishes	Electroless nickel per SAE AMS-2402, Class 3, 500 µm minimum or black anodized per MIL-A-8625, Type III Class 2, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Interfacial Seal Gaskets	Fluorosilicone per SAE AMS-R-25988
Tolerances (unless otherwise specified)	Angles: ±5° Decimals: ±0.010"; Fractions: ±1/64" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"
Note: Molex can manufacture special configurations to your exact specifications.	

MSHT (BLIND-CLEARANCE CUT) FEMALE DRAWINGS

RIGHT-ANGLE BLIND-CLEARANCE CUT NARROW FOOTPRINT THREADED INSERTS

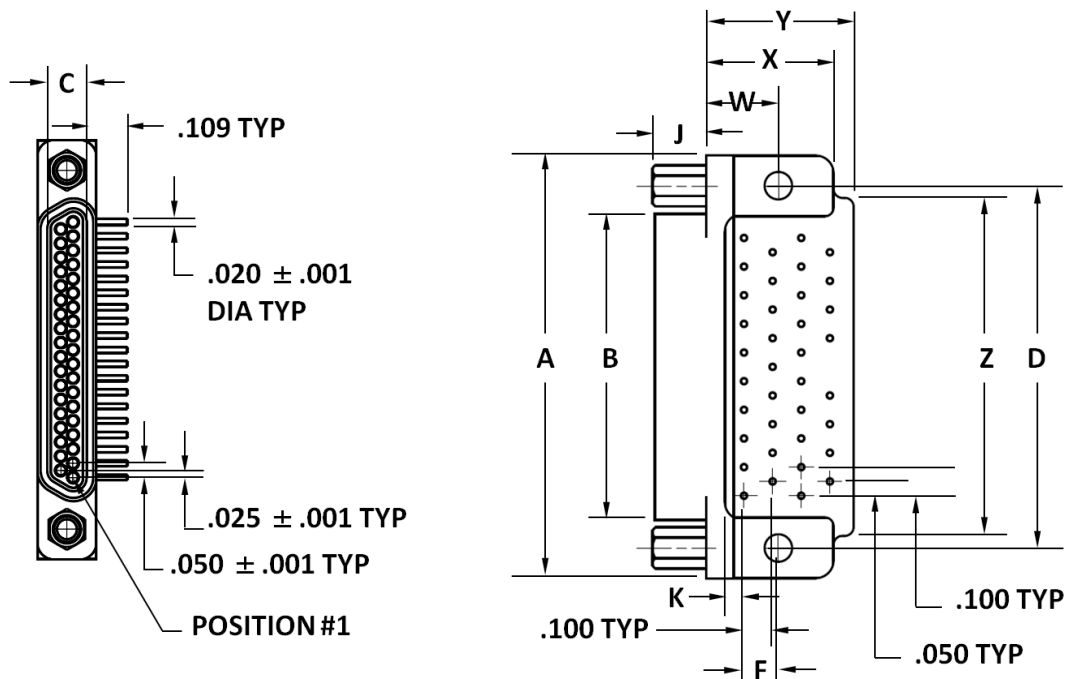


#2-56 JACKPOST (2 PLCS)

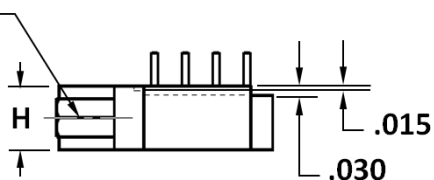

DIMENSIONS

Size	Row	A	B (MAX)	C	D	F	H	J	K	W	X (MAX)	Y (MAX)	Z	Hardware	Mounting Hole
9	2	0.758	0.378	0.218	0.565	0.020	0.208	0.180	0.067	0.250	0.420	0.420	0.755	#2-56 UNC THD	#2-56 UNC Threaded Insert
15		0.928	0.528		0.715	0.120							0.925		
21		1.078	0.678		0.865								1.075		
25		1.178	0.778		0.965						1.175				
31		1.328	0.928		1.115						1.080				
37		1.478	1.078		1.265	1.180									
51	3	1.428	1.028	0.260	1.215	0.150	0.250		0.087	0.300	0.425	0.650	1.220		

**RECOMMENDED PC BOARD LAYOUTS –
MSHT MALE**
RIGHT-ANGLE NARROW FOOTPRINT
STANDARD POLARIZATION

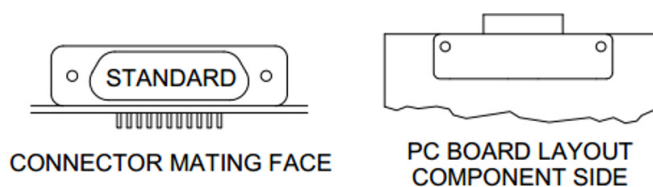

CONNECTOR
MATING FACE



9 POSITION



15 POSITION



21 POSITION



25 POSITION



31 POSITION










37 POSITION




51 POSITION


PC BOARD LAYOUT
COMPONENT SIDE

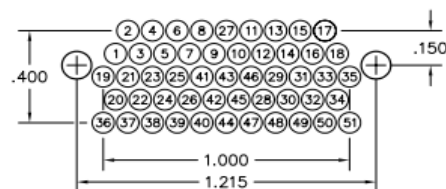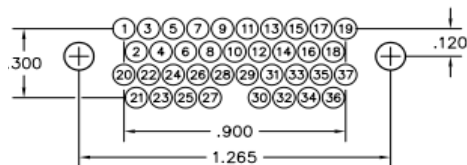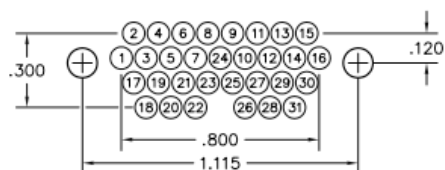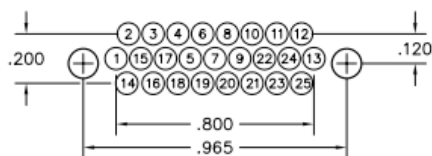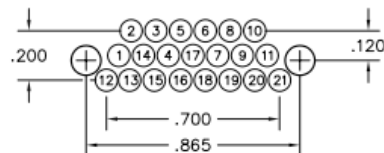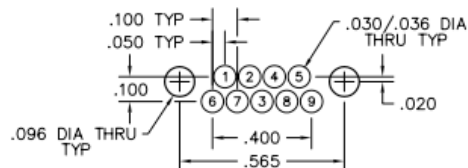


**RECOMMENDED PC BOARD LAYOUTS –
MSHT FEMALE**
RIGHT-ANGLE NARROW FOOTPRINT
STANDARD POLARIZATION

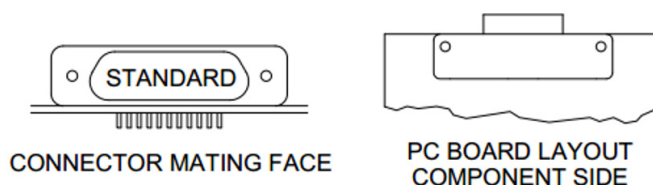

CONNECTOR
MATING FACE




PC BOARD LAYOUT
COMPONENT SIDE

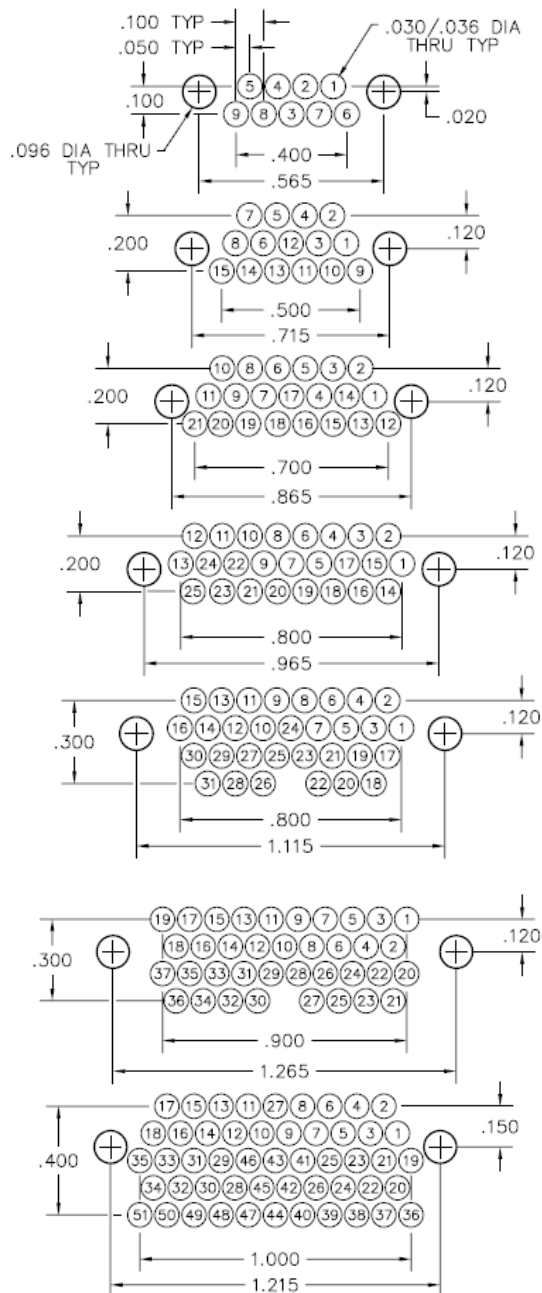

MTHT – Low-Profile I/O Cable with Radius Ear (Male)

MTHT connectors are used in high- temperature applications. These low-profile connectors come with a variety of termination, hardware and wiring options. Custom lengths are available on wire termination products.

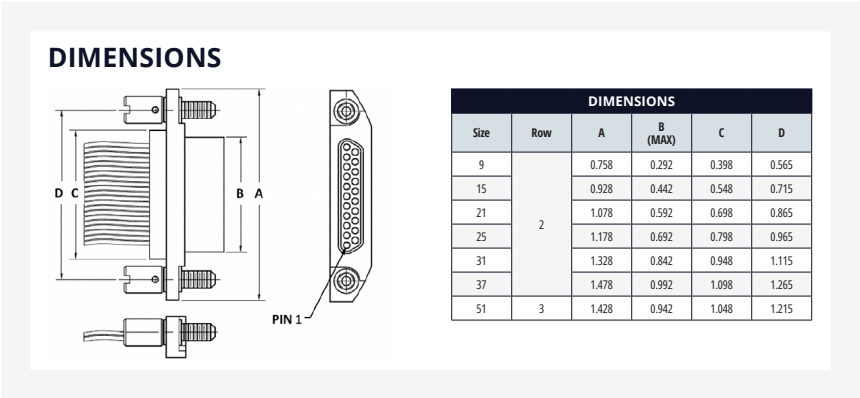

SAMPLE PART NUMBER FORMAT: MTHT-212-021-161-43WQ

MTHT

SERIES

0.050" Low-Profile Metal I/O Connector (Male)

ENTER CODE

ROWS

2 – 2-Row (9-37 contacts)
3 – 3-Row (51 and 69 contacts)

ENTER CODE

BODY STYLE

1 – Plug, straight with ears. Low-profile radius.

ENTER CODE

BODY MATERIAL

2 – High-temp thermoplastic with electroless nickel shell

ENTER CODE

SIZE

009 – 9 Contacts
015 – 15 Contacts
021 – 21 Contacts
025 – 25 Contacts
031 – 31 Contacts
037 – 37 Contacts
051 – 51 Contacts

ENTER CODE

CONTACT/TERMINATION TYPE

1A – Pin, straight, 24 AWG solder cup
11 – Pin, straight, 26 AWG solder cup
12 – Pin, straight, 0.125" lead length*
13 – Pin, straight, 0.250" lead length*
14 – Pin, straight, 0.500" lead length*
16 – Pin, straight, crimped wire

ENTER CODE

PLATING

1 – 50 µm Au contacts (crimp wire)
3 – 50 µm Au contacts; Au terminations (solder cup, pigtail)

ENTER CODE

HARDWARE

00 – No hardware
41 – Two turning jackscrews, Allen head
43 – Two turning jackscrews, slot head

ENTER CODE

WIRING

00 – None
XX – See Wiring Codes

MTHT-212-021-161-43WQ



PERFORMANCE	
Contact Rating	3 amperes maximum
Operating Temperature	-55° C to 205° C
Test Voltage	600V, RMS, 60Hz
Insulation Resistance	5,000 megohms minimum at 500 VDC
Durability	500 connector mating cycles
Contact Engaging Force	6.0 oz maximum/contact
Contact Separating Force	0.5 oz minimum/contact
Mating and Un-mating Force	10 oz maximum/contact

HIGH-RELIABILITY CONTACT

MIL-DTL-83513


NOTES

*0.018 diameter

MATERIALS AND FINISHES	
Pin Contacts	Copper-based alloy strip
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shells	Aluminum alloy 6061-T6 per SAE AMS-QQ-A-250/11or 6061-T6511 per SAE AMS-QQ-A-200/8
Shell Finishes	Electroless nickel per SAE AMS-2402, Class 3, 500 µm minimum
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Tolerances (unless otherwise specified)	Angles: ±5° Decimals: ±0.010"; Fractions: ±1/64" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"
Note: Molex can manufacture special configurations to your exact specifications.	

MTHT MALE DRAWINGS

STRAIGHT MULTI-ROW CABLE-TO-CABLE

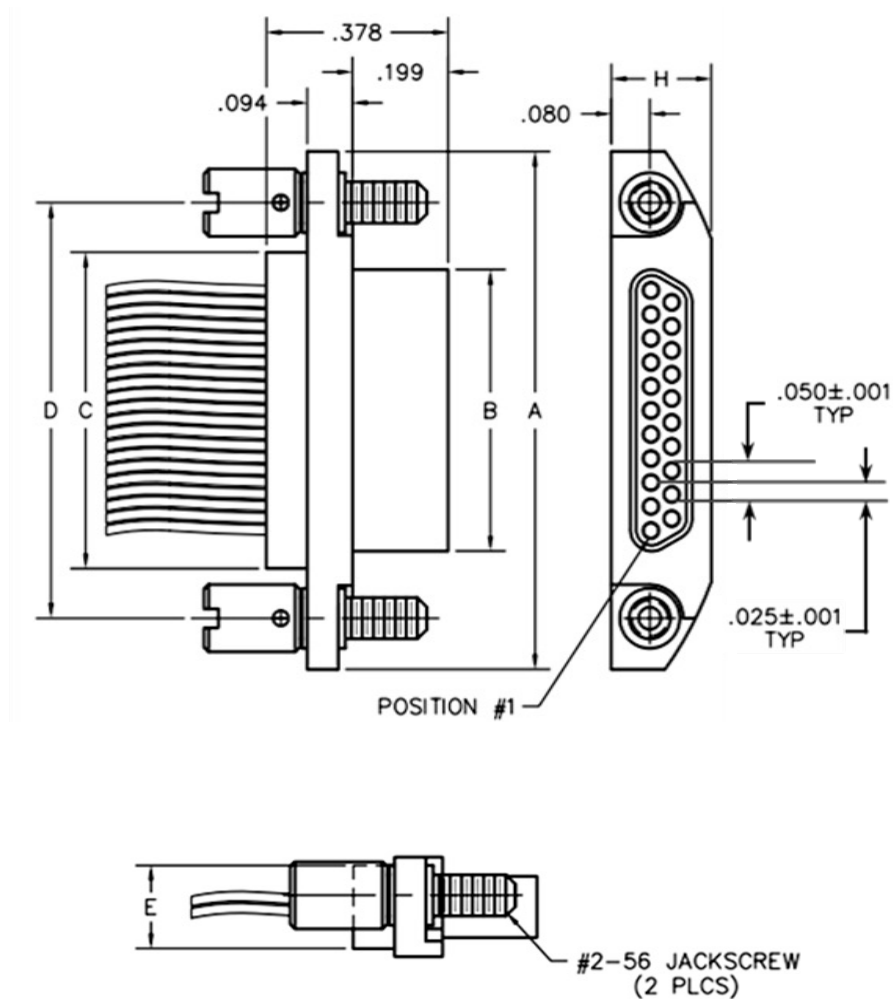

DIMENSIONS								
Size	Row	A	B (MAX)	C	D	E (MAX)	H	Hardware
9	2	0.758	0.292	0.398	0.565	0.173	0.208	#2-56 UNC THD
15		0.928	0.442	0.548	0.715			
21		1.078	0.592	0.698	0.865			
25		1.178	0.692	0.798	0.965			
31		1.328	0.842	0.948	1.115			
37		1.478	0.992	1.098	1.265			
51	3	1.428	0.942	1.048	1.215	0.220	0.250	

MTHT – Low-Profile, Right-Angle Board-Mount with Radius Ear (Female)

MTHT connectors are used in high-temperature applications where a right-angle, plated through-hole termination is desired for mounting. The narrow footprint on this connector can help save board space.


DIMENSIONS

DIMENSIONS										
Size	Row	A	B (MAX)	D	Z	H	W	Y (MAX)	Hardware	
9	2	0.758	0.378	0.565	0.600	0.208	0.250	0.420	#2-56 UNC THD	
15		0.928	0.528	0.715	0.750					
21		1.078	0.678	0.865	0.900					
25		1.178	0.778	0.965	1.000					
31		1.328	0.928	1.115	1.150			0.520		
37		1.478	1.078	1.265	1.300					
51	3	1.428	1.028	1.215	1.220	0.250	0.300	0.650		

SAMPLE PART NUMBER FORMAT: MTHT-2E2-021-433-000S

MTHT	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE
SERIES 0.050" Low-Profile Metal PC Board-Mount Connector (Female)	ROWS 2 – 2-Row (9-37 contacts) 3 – 3-Row (51 and 69 contacts)	BODY STYLE E – Receptacle, right-angle, with four mounting holes. Low-profile radius.	BODY MATERIAL 2 – High-temp thermoplastic with electroless nickel shell	SIZE 009 – 9 Contacts 015 – 15 Contacts 021 – 21 Contacts 025 – 25 Contacts 031 – 31 Contacts 037 – 37 Contacts 051 – 51 Contacts	CONTACT/TERMINATION TYPE 43 – Socket, right-angle, 0.109" x 0.016" dia. 44 – Socket, right-angle, 0.140" x 0.016" dia. 45 – Socket, right-angle, 0.172" x 0.016" dia.	PLATING 3 – 50 µm Au contacts; Au terminations (solder cup, pigtail)	HARDWARE 00 – Integrated jacknuts	POLARIZATION 0S – Standard body polarization

MTHT-2E2-021-433-000S

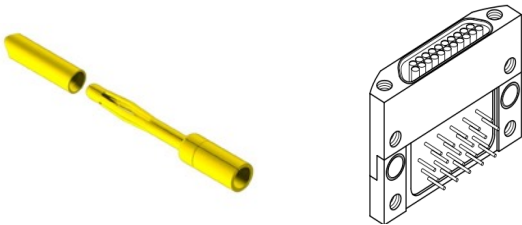

HIGH-RELIABILITY CONTACT MIL-DTL-83513

PERFORMANCE

Contact Rating	3 amperes maximum
Operating Temperature	-55° C to 205° C
Test Voltage	600V, RMS, 60Hz
Insulation Resistance	5,000 megohms minimum at 500 VDC
Durability	500 connector mating cycles
Contact Engaging Force	6.0 oz maximum/contact
Contact Separating Force	0.5 oz minimum/contact
Mating and Un-mating Force	10 oz maximum/contact


MATERIALS AND FINISHES

Socket Contact	Brass per ASTM B121/B121M or ASTM B16/B16M or ASTM B453
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shells	Aluminum alloy 6061-T6 per SAE AMS-QQ-A-250/11 or 6061-T6S11 per SAE AMS-QQ-A-200/8
Shell Finishes	Electroless nickel per SAE AMS-2402, Class 3, 500 µm minimum
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Interfacial Seal Gaskets	Fluorosilicone per SAE AMS-R-25988
Tolerances (unless otherwise specified)	Angles: ±5° Decimals: ±0.010"; Fractions: ±1/64" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"

Note: Molex can manufacture special configurations to your exact specifications.

MHTH FEMALE DRAWINGS


RIGHT-ANGLE BOARD-MOUNT NARROW FOOTPRINT

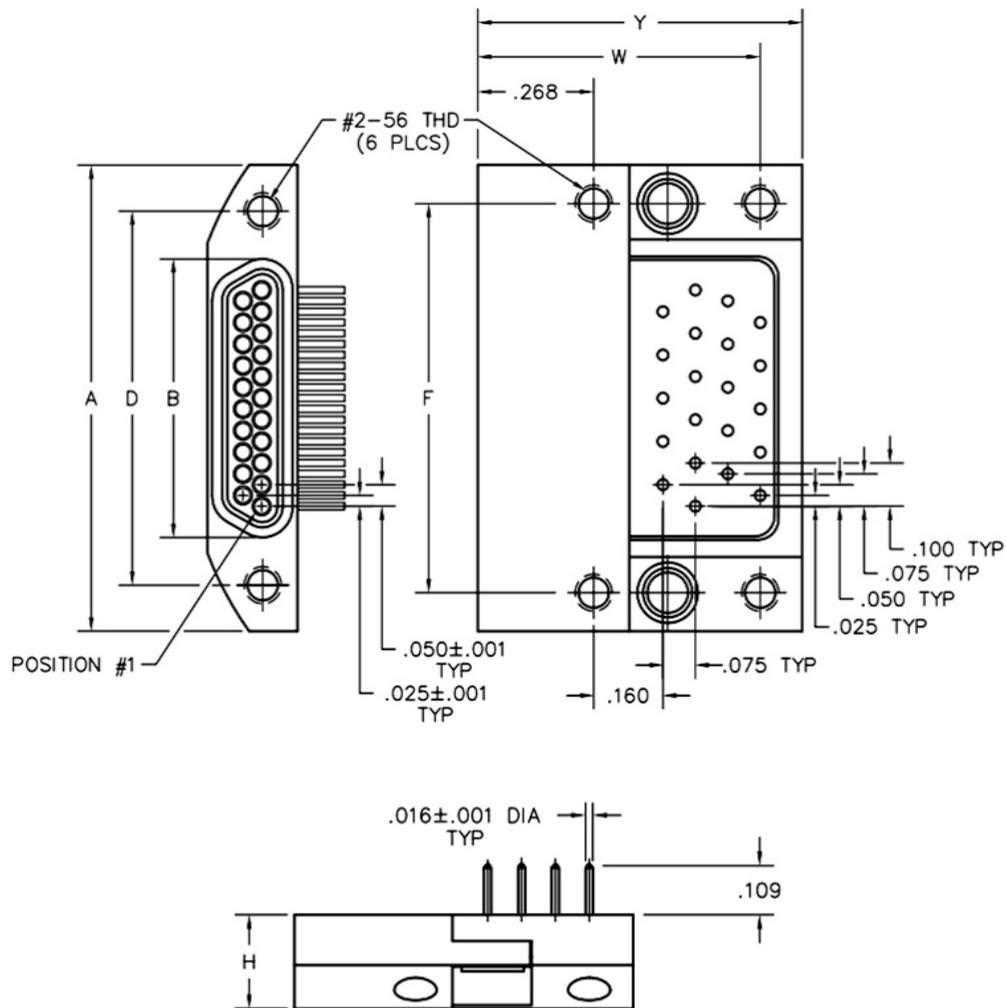

DIMENSIONS								
Size	Row	A	B (MAX)	C	D	E (MAX)	H	Hardware
9	2	0.778	0.292	0.398	0.565	0.173	0.208	#2-56 UNC THD
15		0.928	0.442	0.548	0.715			
21		1.078	0.592	0.698	0.865			
25		1.178	0.692	0.798	0.965			
31		1.328	0.842	0.948	1.115			
37		1.478	0.992	1.098	1.265			
51	3	1.428	0.942	1.048	1.215	0.220	0.250	

RECOMMENDED PC BOARD LAYOUTS – MHTH MALE

LOW-PROFILE, RIGHT-ANGLE STANDARD
POLARIZATION SIZES 9–25

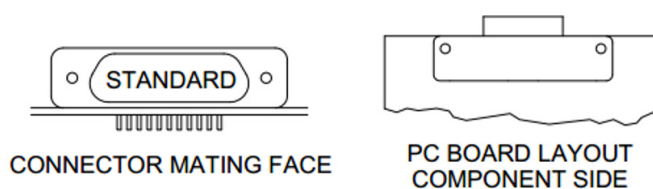

CONNECTOR
MATING FACE



9 POSITION



15 POSITION




21 POSITION




25 POSITION

PC BOARD LAYOUT
COMPONENT SIDE

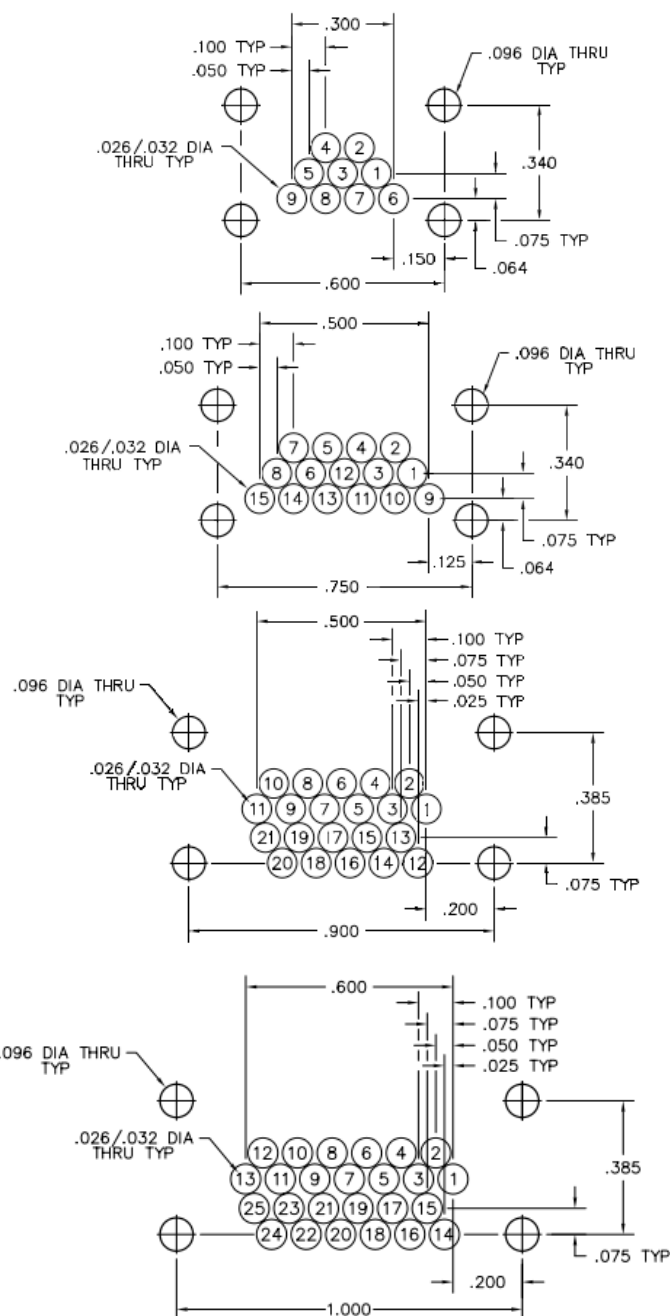




RECOMMENDED PC BOARD LAYOUTS – MTHT FEMALE

LOW-PROFILE, RIGHT-ANGLE STANDARD
POLARIZATION SIZES 31-51

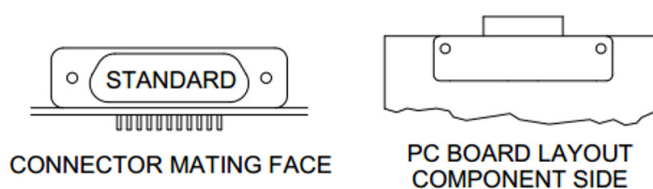

CONNECTOR
MATING FACE

PC BOARD LAYOUT
COMPONENT SIDE

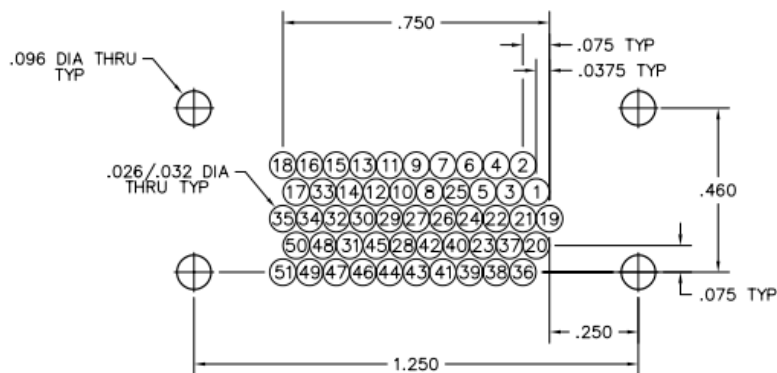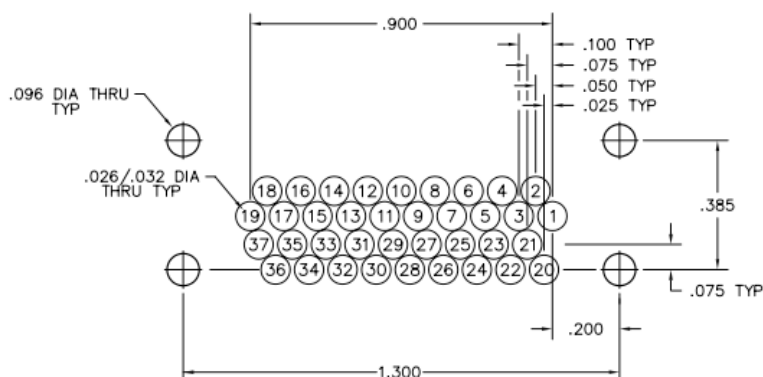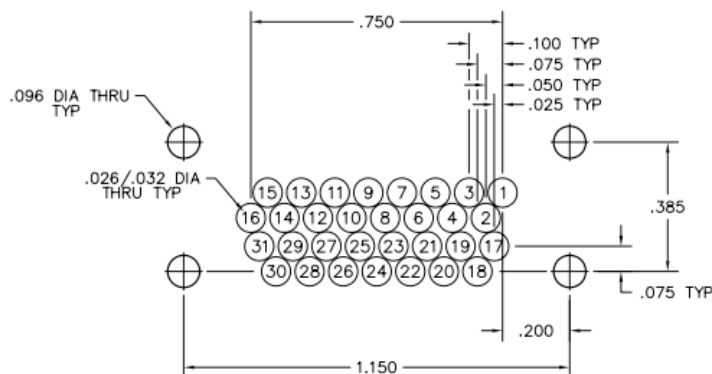

Wire Codes – AirBorn M Series

NEMA HP3-EXBEB (Formerly M16878/4-24 TFE 7 strand)

	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
MIL-STD-681*	WA	WB	WC	UD	UE	WD	UG	UH	UJ	UK	UL	UM	UN	UP	UQ	UR
WHITE	WE	WF	WG	VD	VE	WH	VG	VH	VJ	VK	VL	VM	VN	VP	VQ	VR
YELLOW	WJ	WK	WL			WM										

NEMA HP3-EXBDB (Formerly M16878/4-26 TFE 7 strand)

	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
MIL-STD-681*	WN	WP	WQ	YD	YE	WR	YG	YH	YJ	YK	YL	YM	YN	YP	YQ	YR
WHITE	WS	WT	WU	ZD	ZE	WV	ZG	ZH	ZJ	ZK	ZL	ZM	ZN	ZP	ZQ	ZR
YELLOW	WW	WX	WY			WZ										

NEMA HP3-EXBCB (Formerly M16878/4-28 TFE 7 strand)

	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
MIL-STD-681*	XA	XB	XC	1D	YE	XD	1G	1H	1J	1K	1L	1M	1N	1P	1Q	1R
WHITE	XE	XF	XG	ZD	1E	XH	2G	2H	2J	2K	2L	2M	2N	2P	2Q	2R
YELLOW	XJ	XK	XL			XM										

TWISTED PAIR PER NEMA WC27500-XXRC2U00 (SAE AS22759/11)

	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
24 AWG	AA	AB	AC	AD	AE	AF	AG	AH	AJ	AK	AL	AM	AN	AP	AQ	AR
26 AWG	BA	BB	BC	BD	BE	BF	BG	BH	BJ	BK	BL	BM	BN	BP	BQ	BR

TWISTED PAIR PER NEMA WC27500-XXSC2U00 (SAE AS22759/33)*** [x]

	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
24 AWG	JA	JB	JC	JD	JE	JF	JG	JH	JJ	JK	JL	JM	JN	JP	JQ	JR
26 AWG	KA	KB	KC	KD	KE	KF	KG	KH	KJ	KK	KL	KM	KN	KP	KQ	KR

NOTES

*Connectors with more than 100 contacts will repeat color coding after 100 colors

**Wire colors per M83513 are ten solid colors, repeating

***Per M83513, corrosion has been experienced on connectors that are pre-wired with 22759/33 and stored in sealed environments.

[x] Option is not RoHS-compliant

For twisted pair wire connect charts, see page MA-9

Twisted pair wire not available on MA, MC or Hybrid connectors

Wire Codes – AirBorn M Series

SAE AS22759/11-24																
	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
M83513**	5A	5B	5C	5D	5E	5F	5G	5H	5J	5K	5L	5M	5N	5P	5Q	5R
MIL-STD-681*	CA	CB	CC	CD	CE	CF	CG	CH	CJ	CK	CL	CM	CN	CP	CQ	CR
WHITE	DA	DB	DC	DD	DE	DF	DG	DH	DJ	DK	DL	DM	DN	DP	DQ	DR

SAE AS22759/11-26																
	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
M83513**	6A	6B	V1	6D	6E	V2	6G	6H	6J	6K	6L	Y6	6N	6P	6Q	6R
MIL-STD-681*	X3	X4	W3	ED	EE	W4	EG	EH	EJ	EK	EL	EM	EN	EP	EQ	ER
WHITE	X1	X2	W1	FD	FE	W2	FG	FH	FJ	FK	FL	Y5	FN	FP	FQ	FR

SAE AS22759/33-24***																
	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
M83513**	LA	LB	LC	LD	LE	LF	LG	LH	LJ	LK	LL	LM	LN	LP	LQ	LR
WHITE	MA	MB	MC	MD	ME	MF	MG	MH	MJ	MK	ML	MM	MN	MP	MQ	MR

SAE AS22759/33-26*** [x]																
	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
M83513**	NA	NB	Y3	ND	NE	Y4	NG	NH	NJ	NK	NL	Y8	NN	NP	NQ	NR
WHITE	PA	PB	Y1	PD	PE	Y2	PG	PH	PJ	PK	PL	Y7	PN	PP	PQ	PR

TWISTED PAIR PER NEMA WC27500-XXSC2U00 (SAE AS22759/33)*** [x]																
	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
24 AWG	JA	JB	JC	JD	JE	JF	JG	JH	JJ	JK	JL	JM	JN	JP	JQ	JR
26 AWG	KA	KB	KC	KD	KE	KF	KG	KH	KJ	KK	KL	KM	KN	KP	KQ	KR

NOTES

*Connectors with more than 100 contacts will repeat color coding after 100 colors

**Wire colors per M83513 are ten solid colors, repeating

***Per M83513, corrosion has been experienced on connectors that are pre-wired with 22759/33 and stored in sealed environments.

[x] Option is not RoHS-compliant


**Delete this page in the pdf once you have
made the single page pdf.
This page is only for spread pdfs.**

AIRBORN N SERIES NANO-D HIGH-TEMPERATURE CONNECTORS

NMHT – I/O Cable (Male)

NMHT connectors are used in high-temperature applications. These rugged cable connectors come with a variety of termination, hardware and wiring options. Custom lengths are available on wire termination products.

DIMENSIONS




DIMENSIONS						
Size	A	B	C	E	J	Hardware
9	0.375	0.270	0.160	0.1250	0.0575	#0-80 Thread
15	0.450	0.345	0.235			
21	0.525	0.420	0.310			
25	0.575	0.470	0.360			
31	0.650	0.545	0.435			
37	0.725	0.620	0.510			
51	0.900	0.795	0.685			
65	1.075	0.970	0.860			
69	1.125	1.020	0.910			

SAMPLE PART NUMBER FORMAT: NMHT-212-025-161-JCAC

NMHT	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE
SERIES 0.025" Metal I/O Connector (Male)	ROWS 2 – 2-Row (9-69 contacts)	BODY STYLE 2 – Plug, straight 6 – Plug, straight with factory-installed backshell	BODY MATERIAL 2 – Liquid crystal polymer with electroless nickel shell 4 – Liquid crystal polymer with stainless steel shell	SIZE 009 – 9 Contacts 015 – 15 Contacts 021 – 21 Contacts 025 – 25 Contacts 031 – 31 Contacts 037 – 37 Contacts 051 – 51 Contacts 065 – 65 Contacts 069 – 69 Contacts	CONTACT/TERMINATION TYPE 26 – Pin, straight, crimped wire	PLATING 1 – 50 µm Au contacts	HARDWARE 00 – No hardware JC – Turning jackscrews, captivated #0-80 UNF* TH – Threaded hole, #0-80 UNF*	WIRING XX – See Wiring Codes

NMHT-212-025-161-JCAC

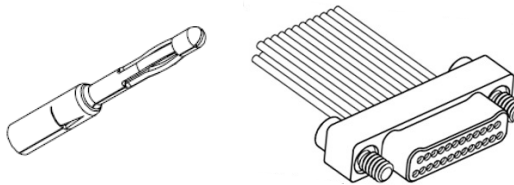

3-TINE SPRING MEMBER, CRIMP (PIN)

NOTES

*0.050 hex key (#0-80 thread)
Recommended torque value: 1.0 inch-lbs. max (#0-80 thread).
Ball end hex wrench not recommended.
Hex wrench key/bit conforming to the requirements of ASME/ANSI B-18.3 is recommended.
0.050" hex L-key long arm wrench: order Molex part #CDG14148.

PERFORMANCE


Contact Rating	1 ampere maximum
Solderability	Terminals (except crimp) tested per MIL-STD-202, method 28
Wire Size	Stranded #30 and #32 AWG or solid #30 AWG standard (consult factory for other sizes and types)
Test Voltage	250V, RMS, 60 Hz
Insulation Resistance	5,000 megohms minimum at 100 VDC
Durability	200 connector mating cycles
Vibration	Tested per MIL-STD-1344, method 2005, cond. IV
Shock	Tested per MIL-STD-1344, method 2004, cond. G
Salt Spray	Tested (mated) per MIL-STD-1344, method 1001, cond. B
Humidity	Tested (mated) per MIL-STD-1344, method 1002, type II (except steps 7a and 7b)
Thermal Shock	Tested to temperature extremes of MIL-STD-1344, method 1003, condition A (except step 3, temperature shall be 125° C)
Contact Resistance	0.022 V max drop at 1.0 amps (0.022 ohms)
Contact Engaging Force	5.0 ounce max with minimum diameter test sleeve
Contact Separating Force	0.4 ounce min with minimum diameter test sleeve
Crimp Strength	1 pound min tensile strength

MATERIALS AND FINISHES

Pins	BeCu alloy strip per ASTM B194
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shell	Aluminum with electroless nickel per SAE AMS-C-26074, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Tolerances (unless otherwise specified)	Angles: ±2° Decimals: ±0.005" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"

Note: Molex can manufacture special configurations to your exact specifications.

NMHT MALE DRAWINGS
STRAIGHT MULTI-ROW CABLE-TO-CABLE

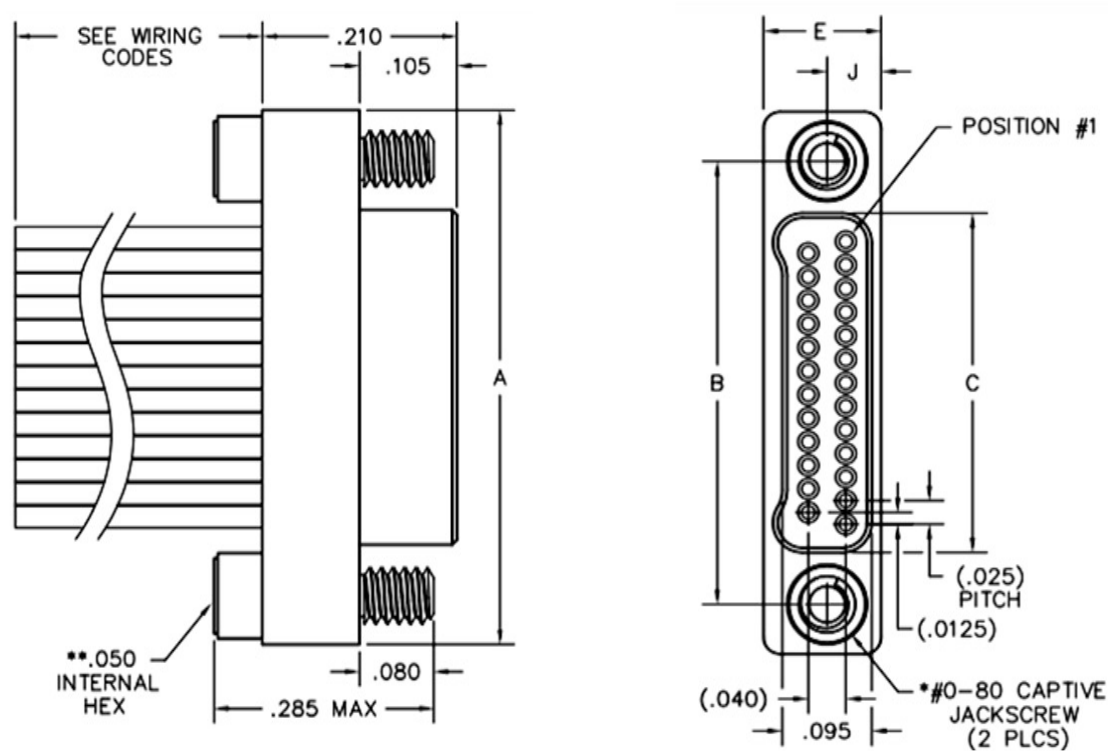


DIMENSIONS						
Size	A	B	C	E	J	Hardware
9	0.375	0.270	0.160	0.1250	0.0575	#0-80 Thread
15	0.450	0.345	0.235			
21	0.525	0.420	0.310			
25	0.575	0.470	0.360			
31	0.650	0.545	0.435			
37	0.725	0.620	0.510			
51	0.900	0.795	0.685			
65	1.075	0.970	0.860			
69	1.125	1.020	0.910			

NMHT – I/O Cable (Female)

NMHT connectors are used in high-temperature applications. These rugged cable connectors come with a variety of termination, hardware and wiring options. Custom lengths are available on wire termination products.

DIMENSIONS

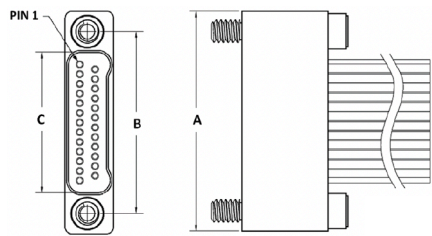


DIMENSIONS			
Size	A	B	C
9	0.375	0.270	0.163
15	0.450	0.345	0.238
21	0.525	0.420	0.313
25	0.575	0.470	0.363
31	0.650	0.545	0.438
37	0.725	0.620	0.513
51	0.900	0.795	0.688
65	1.075	0.970	0.863
69	1.125	1.020	0.913

SAMPLE PART NUMBER FORMAT: NMHT-222-025-261-JCA

NMHT	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE
SERIES 0.025" Metal I/O Connector (Female)	ROWS 2 – 2-Row (9-69 contacts)	BODY STYLE 2 – Receptacle, straight 6 – Receptacle, straight with factory-installed backshell	BODY MATERIAL 2 – Liquid crystal polymer with electroless nickel shell 4 – Liquid crystal polymer with stainless steel shell	SIZE 009 – 9 Contacts 015 – 15 Contacts 021 – 21 Contacts 025 – 25 Contacts 031 – 31 Contacts 037 – 37 Contacts 051 – 51 Contacts 065 – 65 Contacts 069 – 69 Contacts	PLATING 1 – 50 µm Au contacts	HARDWARE 00 – No hardware JC – Turning jackscrews, captivated #0-80 UNF* TH – Threaded hole, #0-80 UNF*	WIRING XX – See Wiring Codes	
				CONTACT/TERMINATION TYPE 26 – Socket, straight, crimped wire				

NMHT-222-025-261-JCAC

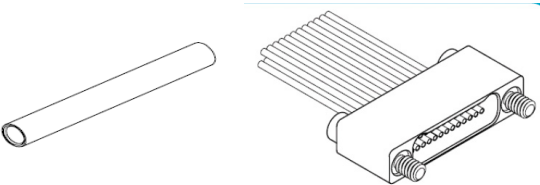

DRAWN TUBE, CRIMP (SOCKET)

NOTES

*0.050 hex key (#0-80 thread)
 Recommended torque value: 1.0 inch-lbs. max (#0-80 thread). Ball end hex wrench not recommended.
 Hex wrench key/bit conforming to the requirements of ASME/ANSI B-18.3 is recommended.
 0.050" hex L-key long arm wrench: order Molex part #CDG14148.

PERFORMANCE

Contact Rating	1 ampere maximum
Solderability	Terminals (except crimp) tested per MIL-STD-202, method 28
Wire Size	Stranded #30 and #32 AWG or solid #30 AWG standard (consult factory for other sizes and types)
Test Voltage	250V, RMS, 60 Hz
Insulation Resistance	5,000 megohms minimum at 100 VDC
Durability	200 connector mating cycles
Vibration	Tested per MIL-STD-1344, method 2005, cond. IV
Shock	Tested per MIL-STD-1344, method 2004, cond. G
Salt Spray	Tested (mated) per MIL-STD-1344, method 1001, cond. B
Humidity	Tested (mated) per MIL-STD-1344, method 1002, type II (except steps 7a and 7b)
Thermal Shock	Tested to temperature extremes of MIL-STD-1344, method 1003, condition A (except step 3, temperature shall be 125° C)
Contact Resistance	0.022 V max drop at 1.0 amps (0.022 ohms)
Contact Engaging Force	5.0 oz max with minimum diameter test sleeve
Contact Separating Force	0.4 oz min with minimum diameter test sleeve
Crimp Strength	1 pound min tensile strength


MATERIALS AND FINISHES

Sockets	BeCu per ASTM B194, or NiAg per ASTM B194
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shell	Aluminum with electroless nickel per SAE AMS-C-26074, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Tolerances (unless otherwise specified)	Angles: ±2° Decimals: ±0.005" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"

Note: Molex can manufacture special configurations to your exact specifications.

NMHT FEMALE DRAWINGS

STRAIGHT MULTI-ROW CABLE-TO-CABLE

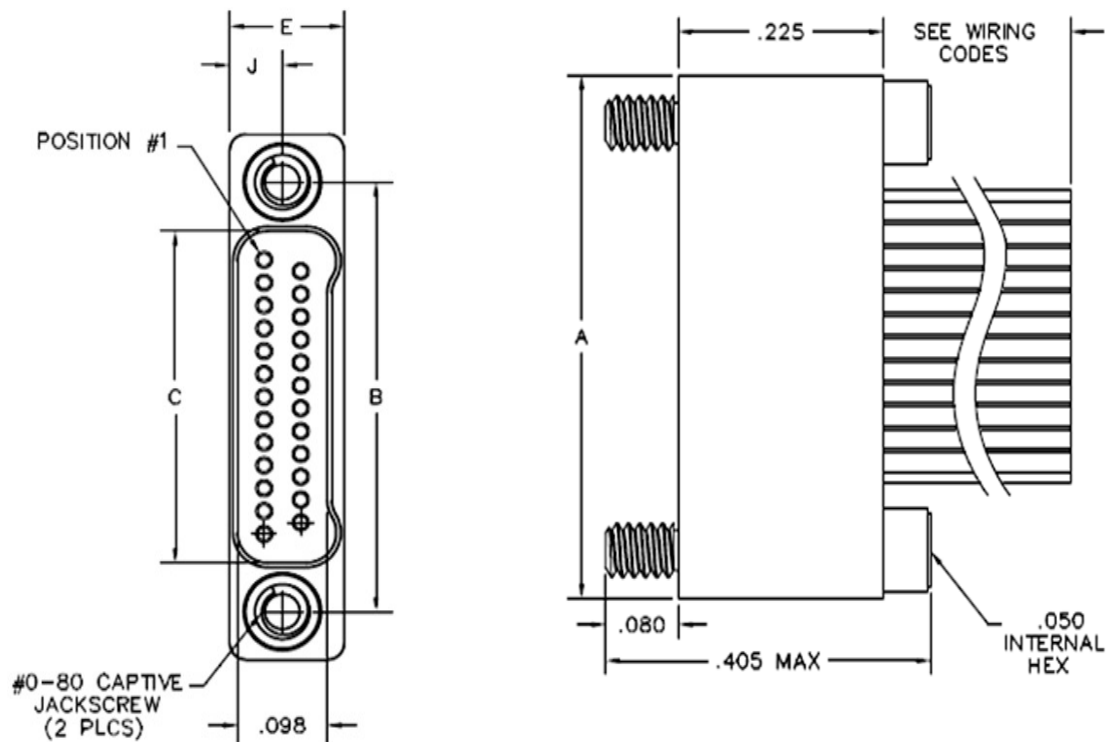


DIMENSIONS						
Size	A	B	C	E	J	Hardware
9	0.375	0.270	0.163	0.1250	0.0575	#0-80 Thread
15	0.450	0.345	0.238			
21	0.525	0.420	0.313			
25	0.575	0.470	0.363			
31	0.650	0.545	0.438			
37	0.725	0.620	0.513			
51	0.900	0.795	0.688			
65	1.075	0.970	0.863			
69	1.125	1.020	0.913			

NKHT – Right-Angle Board-Mount (Male)

NKHT connectors are used in high-temperature applications where a right-angle, plated through-hole termination is desired for mounting.

DIMENSIONS

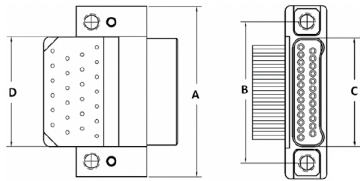

DIMENSIONS				
Size	A	B	C	D
9	0.375	0.270	0.160	0.170
15	0.450	0.345	0.235	0.245
21	0.525	0.420	0.310	0.320
25	0.575	0.470	0.360	0.370
31	0.650	0.545	0.435	0.445
37	0.725	0.620	0.510	0.520
51	0.900	0.795	0.685	0.695
65	1.075	0.970	0.860	0.870
69	1.125	1.020	0.910	0.920

SAMPLE PART NUMBER FORMAT: NKHT-2E2-025-325-TH00

NKHT

SERIES

0.025" Metal PC Board-Mounted Connector (Male)

ENTER CODE

ROWS

2 – 2-Row (9-69 contacts)

ENTER CODE

BODY STYLE

E – Plug, right-angle, plated thru-hole

ENTER CODE

BODY MATERIAL

2 – Liquid crystal polymer with electroless nickel shell
4 – Liquid crystal polymer with stainless steel shell

ENTER CODE

SIZE

009 – 9 Contacts
015 – 15 Contacts
021 – 21 Contacts
025 – 25 Contacts
031 – 31 Contacts
037 – 37 Contacts
051 – 51 Contacts
065 – 65 Contacts
069 – 69 Contacts

ENTER CODE

PLATING

3 – 50 µm Au contacts; Au terminations

ENTER CODE

HARDWARE

00 – No hardware
TH – Threaded hole, #0-80 UNF*

ENTER CODE


WIRING

00 – None

CONTACT/TERMINATION TYPE

32 – Pin, right-angle, 0.109" x 0.010" dia.
33 – Pin, right-angle, 0.140" x 0.010" dia.
34 – Pin, right-angle, 0.172" x 0.010" dia.

NKHT-2E2-025-325-TH00

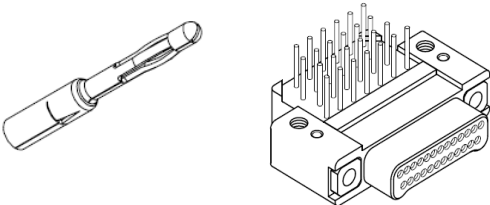

3-TINE SPRING MEMBER, CRIMP (PIN)

NOTES

*0.050 hex key (#0-80 thread)
Recommended torque value: 1.0 inch-lbs max (#0-80 thread). Ball end hex wrench not recommended.
Hex wrench key/bit conforming to the requirements of ASME/ANSI B-18.3 is recommended. 0.050" hex L-key long arm wrench: order Molex Part Number CDG14148.

PERFORMANCE

Contact Rating	1 ampere maximum
Solderability	Terminals (except crimp) tested per MIL-STD-202, method 28
Wire Size	Stranded #30 and #32 AWG or solid #30 AWG standard (consult factory for other sizes and types)
Test Voltage	250V, RMS, 60 Hz
Insulation Resistance	5,000 megohms minimum at 100 VDC
Durability	200 connector mating cycles
Vibration	Tested per MIL-STD-1344, method 2005, cond. IV
Shock	Tested per MIL-STD-1344, method 2004, cond. G
Salt Spray	Tested (mated) per MIL-STD-1344, method 1001, cond. B
Humidity	Tested (mated) per MIL-STD-1344, method 1002, type II (except steps 7a and 7b)
Thermal Shock	Tested to temperature extremes of MIL-STD-1344, method 1003, condition A (except step 3, temperature shall be 125° C)
Contact Resistance	0.022 V max drop at 1.0 amps (0.022 ohms)
Contact Engaging Force	5.0 oz max with minimum diameter test sleeve
Contact Separating Force	0.4 oz min with minimum diameter test sleeve
Crimp Strength	1 pound min tensile strength


MATERIALS AND FINISHES

Pins	BeCu alloy strip per ASTM B194
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shell	Aluminum with electroless nickel per SAE AMS-C-26074, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Tolerances (unless otherwise specified)	Angles: ±2° Decimals: ±0.005" Wire lengths: insulated/stranded: +1.0"/-0.0" uninsulated/solid: +0.2"/-0.0"

Note: Molex can manufacture special configurations to your exact specifications.

NKHT MALE DRAWINGS


RIGHT-ANGLE BOARD-MOUNT PLATED THROUGH-HOLE

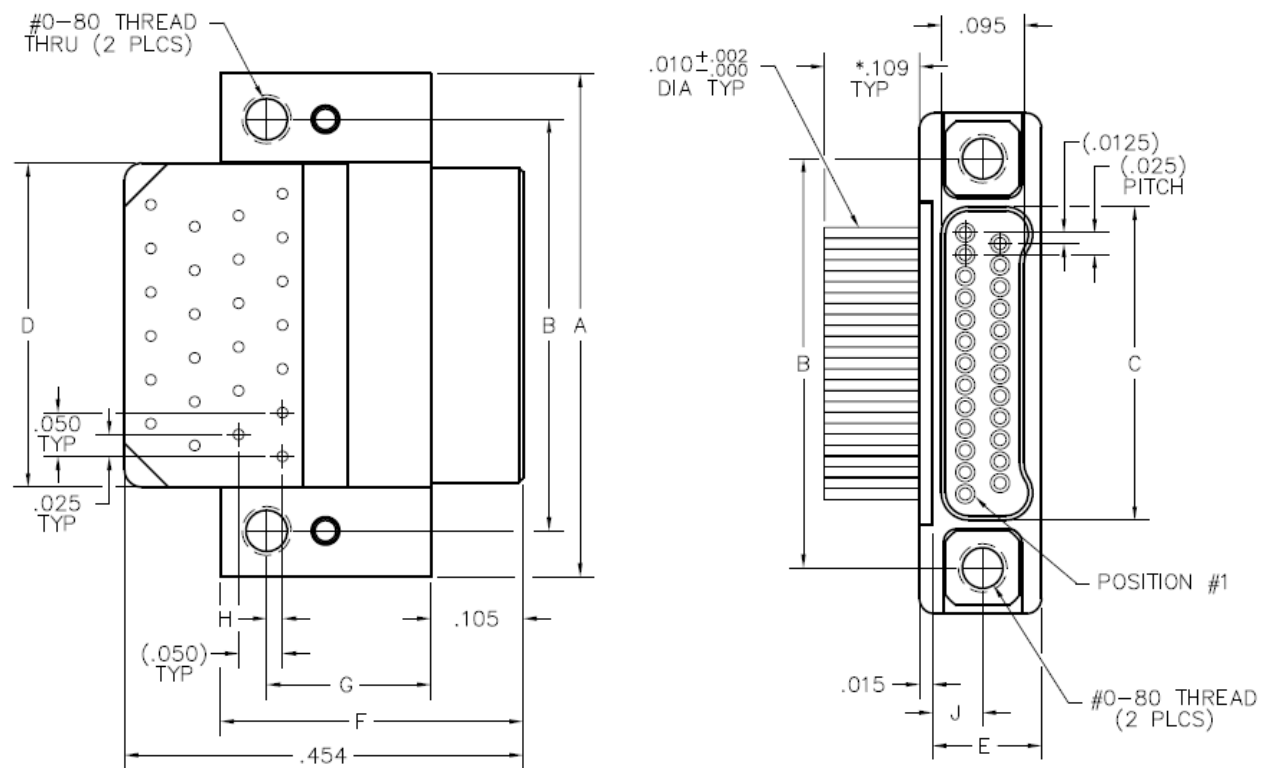

* OTHER LENGTHS AS REQUIRED

DIMENSIONS									
Size	A	B	C	D	E	F	G	J	Hardware
9	0.375	0.270	0.160	0.170	0.1250	0.3450	0.0180	0.0575	#0-80 Thread
15	0.450	0.345	0.235	0.245					
21	0.525	0.420	0.310	0.320					
25	0.575	0.470	0.360	0.370					
31	0.650	0.545	0.435	0.445					
37	0.725	0.620	0.510	0.520					
51	0.900	0.795	0.685	0.695					
65	1.075	0.970	0.860	0.870					
69	1.125	1.020	0.910	0.920					

NKHT connectors are used in high-temperature applications where a right-angle, plated through-hole termination is desired for mounting.



DIMENSIONS				
Size	A	B	C	D
9	0.375	0.270	0.13	0.170
15	0.450	0.345	0.238	0.245
21	0.525	0.420	0.313	0.320
25	0.575	0.470	0.363	0.370
31	0.650	0.545	0.438	0.445
37	0.725	0.620	0.513	0.520
51	0.900	0.795	0.688	0.695
65	1.075	0.970	0.863	0.870
69	1.125	1.020	0.913	0.920

NKHT	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	
SERIES 0.025" Metal PC Board-Mounted Connector (Female)	ROWS 2 – 2-Row (9-69 contacts)	BODY STYLE F – Receptacle, right-angle, plated through-hole	BODY MATERIAL 2 – Liquid crystal polymer with electroless nickel shell 4 – Liquid crystal polymer with stainless steel shell	SIZE 009 – 9 Contacts 015 – 15 Contacts 021 – 21 Contacts 025 – 25 Contacts 031 – 31 Contacts 037 – 37 Contacts 051 – 51 Contacts 065 – 65 Contacts 069 – 69 Contacts	CONTACT/TERMINATION TYPE 43 – Socket, right-angle, 0.109" x 0.010" dia. 44 – Socket, right-angle, 0.140" x 0.010" dia. 45 – Socket, right-angle, 0.172" x 0.010" dia.		PLATING 3 – 50 µm Au contacts; Au terminations	HARDWARE 00 – No hardware TH – Threaded hole, #0-80 UNF*	WIRING 00 – None

PERFORMANCE

Contact Rating	1 ampere maximum
Solderability	Terminals (except crimp) tested per MIL-STD-202, method 28
Wire Size	Stranded #30 and #32 AWG or solid #30 AWG standard (consult factory for other sizes and types)
Test Voltage	250V, RMS, 60 Hz
Insulation Resistance	5,000 megohms minimum at 100 VDC
Durability	200 connector mating cycles
Vibration	Tested per MIL-STD-1344, method 2005, cond. IV
Shock	Tested per MIL-STD-1344, method 2004, cond. G
Salt Spray	Tested (mated) per MIL-STD-1344, method 1001, cond. B
Humidity	Tested (mated) per MIL-STD-1344, method 1002, type II (except steps 7a and 7b)
Thermal Shock	Tested to temperature extremes of MIL-STD-1344, method 1003, condition A (except step 3, temperature shall be 125° C)
Contact Resistance	0.022 V max drop at 1.0 amps (0.022 ohms)
Contact Engaging Force	0.50 oz max with minimum diameter test sleeve
Contact Separating Force	0.4 oz min with minimum diameter test sleeve
Crimp Strength	1 pound min tensile strength


*0.050 hex key (#0-80 thread)
Recommended torque value: 1.0 inch-lbs.
max (#0-80 thread).
Ball end hex wrench not recommended.
Hex wrench key/bit conforming to the
requirements of ASME/ANSI B-18.3 is
recommended.
0.050" hex L-key long arm wrench: order
Molex Part Njumber CDG14148

Sockets	BeCu per ASTM B194, or NiAg per ASTM B194
Contact Finish	Gold plate per ASTM B488, SAE AMS-2422
Shell	Aluminum with electroless nickel per SAE AMS-C-26074, or 303 stainless steel per ASTM A581/A581M or ASTM A582/A582M, passivated per SAE AMS-2700
Molded Insulators	High-temp thermoplastic
Embedment	High-temp epoxy
Hardware	Corrosion-resistant steel per ASTM A582/A582M, passivated per ASTM A967, SAE AMS-QQ-P-35
Tolerances (unless otherwise specified)	Angles: $\pm 2^\circ$ Decimals: $\pm 0.005''$ Wire lengths: insulated/stranded: $+1.0''/-0.0''$ uninsulated/solid: $+0.2''/-0.0''$

Note: Molex can manufacture special configurations to your exact specifications.

molex


NKHT FEMALE DRAWINGS **RIGHT-ANGLE BOARD-MOUNT PLATED THROUGH-HOLE**

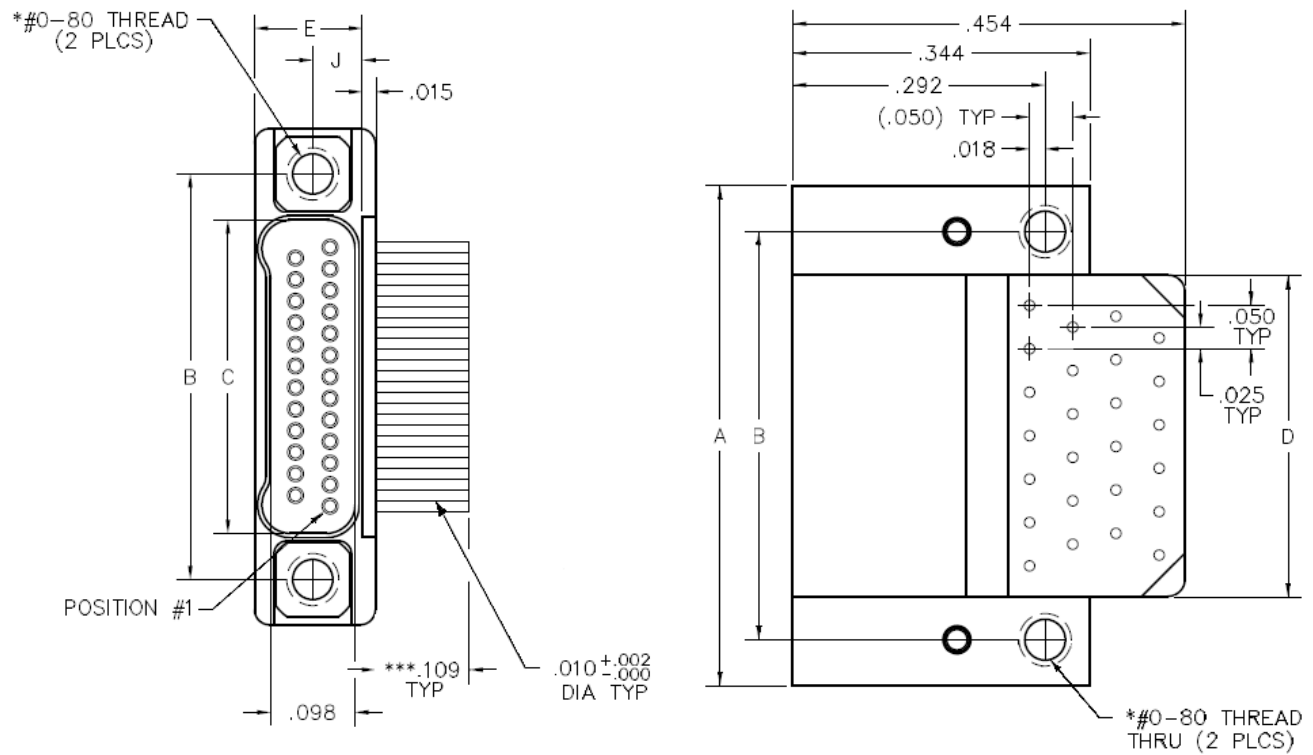


PLEASE CONSULT THE MOLEX WEBSITE FOR THE LATEST VERSION OF THIS DOCUMENT PRIOR TO BEGINNING ANY DESIGN WORK.
 *OTHER LENGTHS AS REQUIRED

DIMENSIONS							
Size	A	B	C	D	E	J	Hardware
9	0.375	0.270	0.163	0.170	0.1250	0.0575	#0-80 Thread
15	0.450	0.345	0.238	0.245			
21	0.525	0.420	0.313	0.320			
25	0.575	0.470	0.363	0.370			
31	0.650	0.545	0.438	0.445			
37	0.725	0.620	0.513	0.520			
51	0.900	0.795	0.688	0.695			
65	1.075	0.970	0.863	0.870			
69	1.125	1.020	0.913	0.920			


**RECOMMENDED PC BOARD
LAYOUTS – NKHT MALE**
RIGHT-ANGLE PLATED THROUGH-
HOLE SIZES 9–31

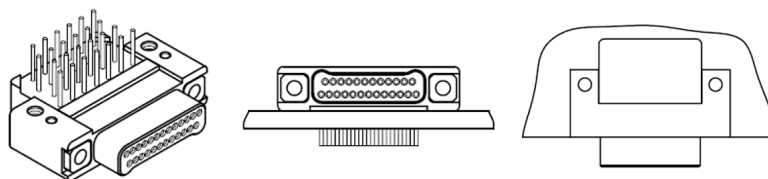


9 POSITION

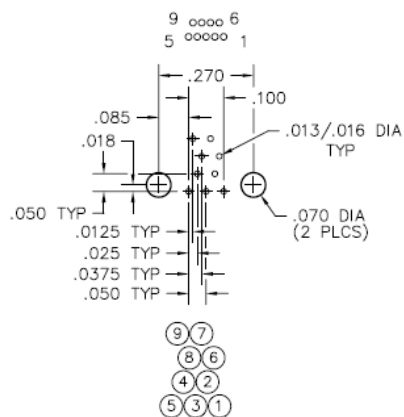


15 POSITION

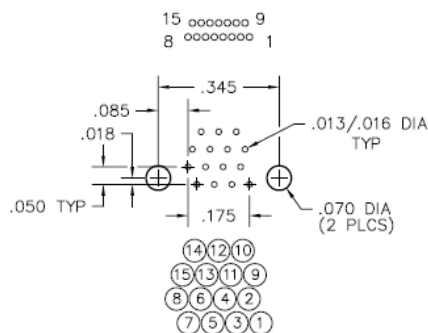


21 POSITION

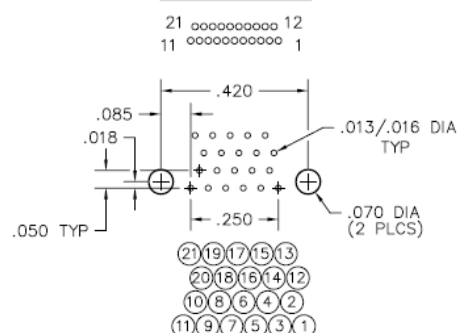


25 POSITION

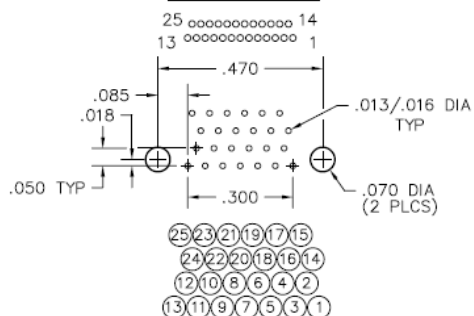


31 POSITION

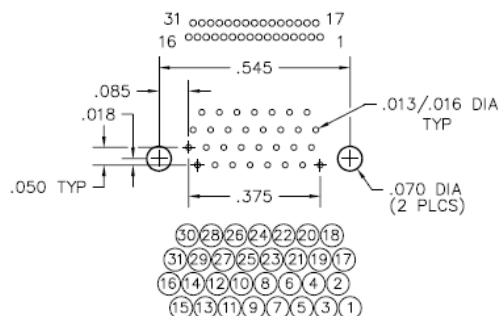


**RECOMMENDED PC BOARD
LAYOUTS – NKHT MALE**
RIGHT-ANGLE PLATED THROUGH-
HOLE SIZES 37–69

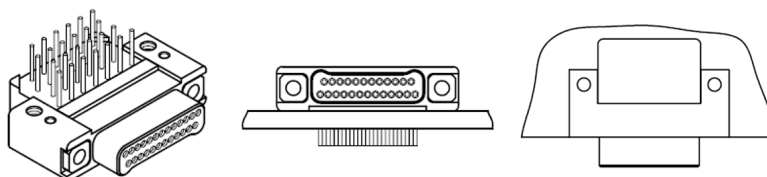


37 POSITION

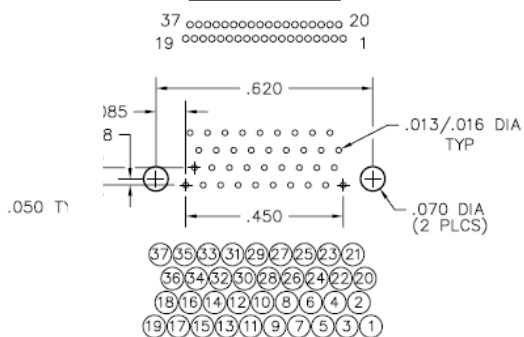


51 POSITION

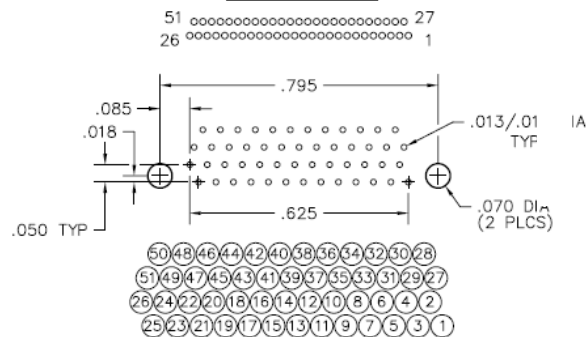




65 POSITION

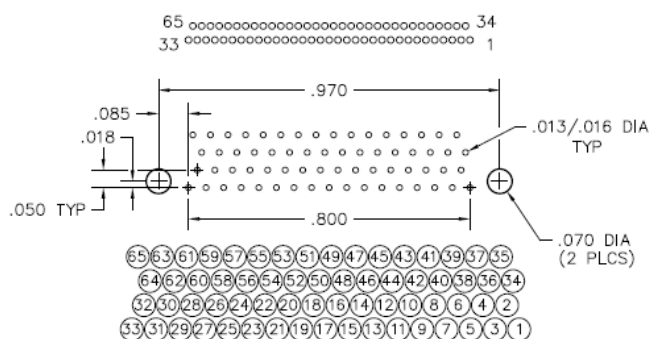


69 POSITION

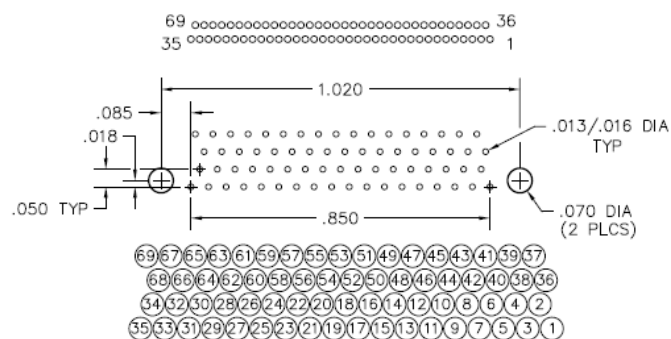


**RECOMMENDED PC BOARD
LAYOUTS – NKHT FEMALE**
RIGHT-ANGLE PLATED THROUGH-
HOLE SIZES 9–31




9 POSITION

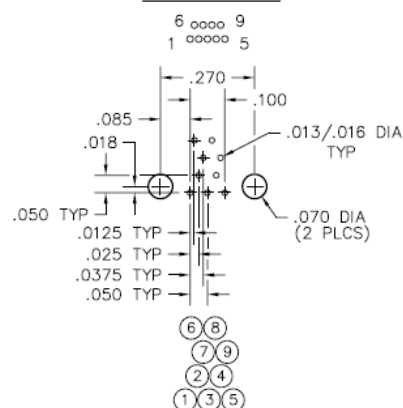


15 POSITION

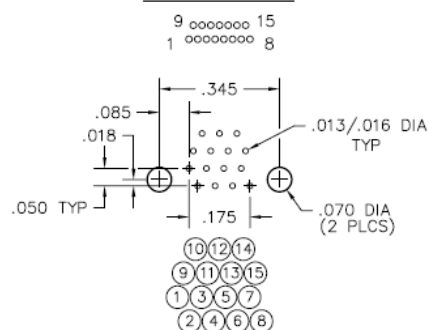


21 POSITION

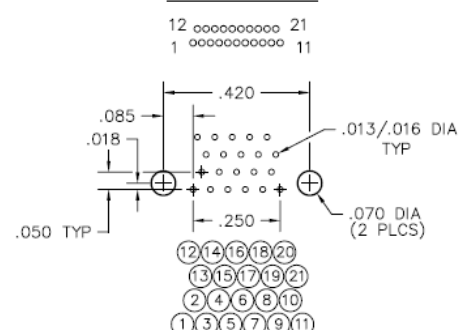




25 POSITION

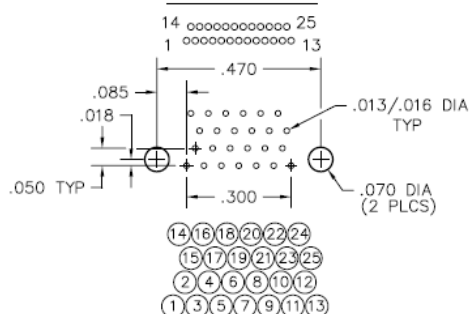


31 POSITION

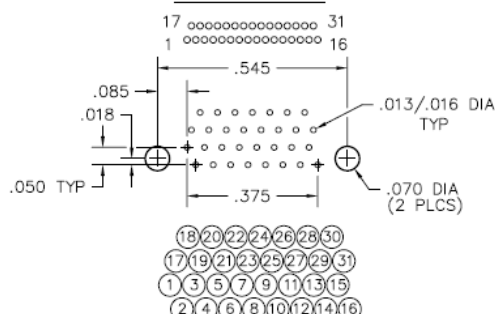


**RECOMMENDED PC BOARD
LAYOUTS – NKHT FEMALE**
RIGHT-ANGLE PLATED THROUGH-
HOLE SIZES 37–69




37 POSITION

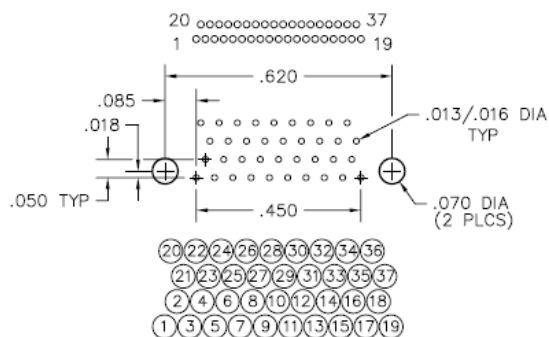


51 POSITION

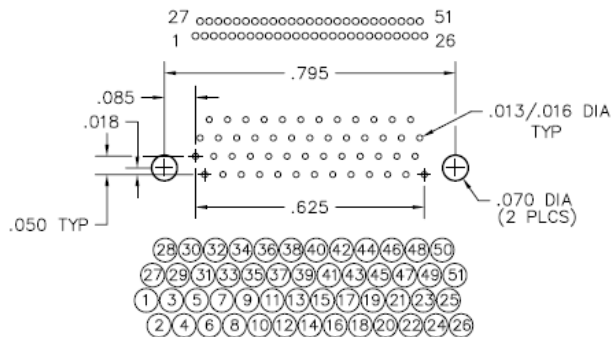

65 POSITION

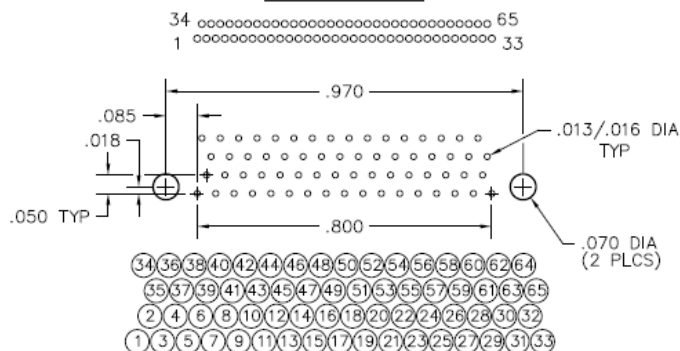

69 POSITION

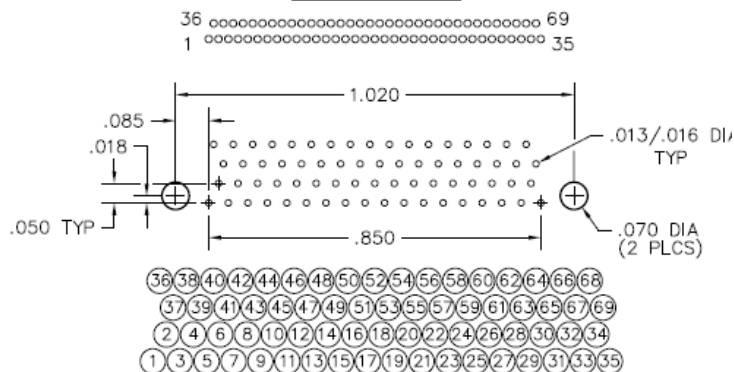

Wire Codes – AirBorn N Series

WIRE CODE	WIRE SIZE	WIRE SPEC	WIRE COLOR	WIRE LENGTH (+1.0"/-0.0")
AA	30 AWG	NEMA HP3	COLOR CODED*	6.0
AB	30 AWG	NEMA HP3	COLOR CODED*	12.0
AC	30 AWG	NEMA HP3	COLOR CODED*	18.0
AD	30 AWG	NEMA HP3	COLOR CODED*	36.0
AE	30 AWG	NEMA HP3	WHITE	6.0
AF	30 AWG	NEMA HP3	WHITE	12.0
AG	30 AWG	NEMA HP3	WHITE	18.0
AH	30 AWG	NEMA HP3	WHITE	36.0
AJ	30 AWG	NEMA HP3	YELLOW	6.0
AK	30 AWG	NEMA HP3	YELLOW	12.0
AL	30 AWG	NEMA HP3	YELLOW	18.0
AM	30 AWG	NEMA HP3	YELLOW	36.0

WIRE CODE	WIRE SIZE	WIRE SPEC	WIRE COLOR	WIRE LENGTH (+1.0"/-0.0")
AN	32 AWG	NEMA HP3	COLOR CODED*	6.0
AP	32 AWG	NEMA HP3	COLOR CODED*	12.0
AQ	32 AWG	NEMA HP3	COLOR CODED*	18.0
AR	32 AWG	NEMA HP3	COLOR CODED*	36.0
AS	32 AWG	NEMA HP3	WHITE	6.0
AT	32 AWG	NEMA HP3	WHITE	12.0
AU	32 AWG	NEMA HP3	WHITE	18.0
AV	32 AWG	NEMA HP3	WHITE	36.0
AW	32 AWG	NEMA HP3	YELLOW	6.0
AX	32 AWG	NEMA HP3	YELLOW	12.0
AY	32 AWG	NEMA HP3	YELLOW	18.0
AZ	32 AWG	NEMA HP3	YELLOW	36.0

WIRE CODE	WIRE SIZE	WIRE SPEC	WIRE COLOR	WIRE LENGTH (+1.0"/-0.0")
BA	30 AWG	SAE-AS22759/33 [x]	COLOR CODED*	6.0
BB	30 AWG	SAE-AS22759/33 [x]	COLOR CODED*	12.0
BC	30 AWG	SAE-AS22759/33 [x]	COLOR CODED*	18.0
BD	30 AWG	SAE-AS22759/33 [x]	COLOR CODED*	36.0
BE	30 AWG	SAE-AS22759/33 [x]	WHITE	6.0
BF	30 AWG	SAE-AS22759/33 [x]	WHITE	12.0
BG	30 AWG	SAE-AS22759/33 [x]	WHITE	18.0
BH	30 AWG	SAE-AS22759/33 [x]	WHITE	36.0

NOTES

*Color coding in accordance with MIL-STD-681, System I, except using ten solid colors, only, in repeating sequence

[x] Option is not RoHS-compliant

NEMA HP3 has replaced MIL-W-16878/6 TFE 7-strand ET. Consult factory for other available wire types.

creating connections for life

molex.com

Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.
Order No. 987652-9121 ©2025 Molex

molex