

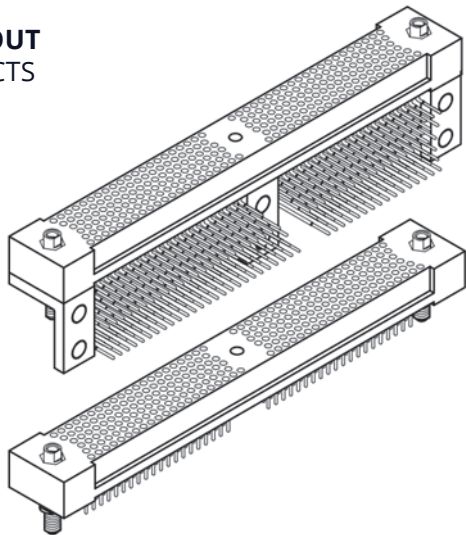


SIX ROW – RIGHT ANGLE PTH RCPT STRAIGHT PTH RCPT

RM6 – RECOMMENDED BOARD LAYOUT
0.075" | 448 THROUGH 604 CONTACTS

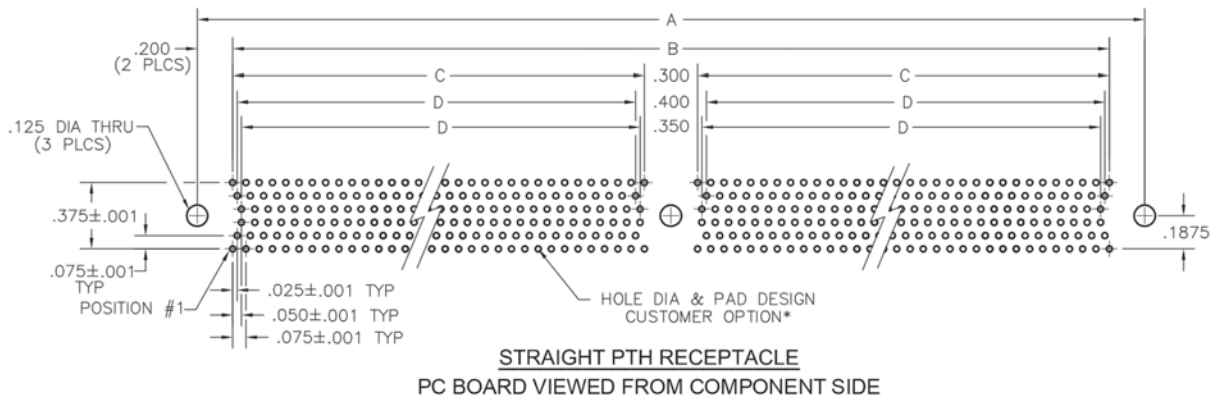

DIMENSIONS				
SIZE	A	B	C	D
448	6.250	5.850	2.775	2.700
604	8.200	7.800	3.750	3.675

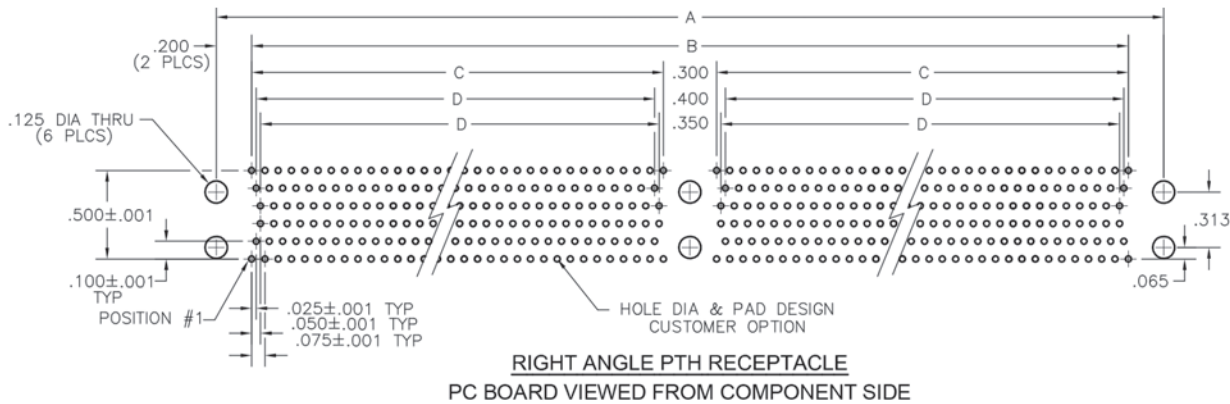

*COMPLIANT TERMINATIONS PCB REQUIREMENTS:
Board Material: FR-4 w/ 1.0 oz. copper
Minimum nominal board thickness: .062"
Drilled hole: .0319"-.0339"
Copper plating thickness: .0010" minimum
Tin-lead plating thickness: .0006" maximum
Electroplated tin-lead composition: 63/37 (Sn/Pb)
Finished hole diameter: .028"±.002"

SIZE	CONTACT ID				SIZE	CONTACT ID			
448	225	228	231	330	333	336	337	340	343
	226	229	232	328	331	334	339	342	345
	227	230	233	329	332	335	338	341	344
	3	6	9	105	108	111	114	117	120
	2	5	8	104	107	110	115	118	121
	1	4	7	106	109	112	113	116	119
604	442	445	448	441	444	447	440	443	446
	303	306	309	443	446	449	445	458	461
	304	307	310	446	449	452	455	458	461
	305	308	311	144	147	150	153	156	159
	3	6	9	143	146	149	154	157	160
	2	5	8	145	148	151	152	155	158
604	1	4	7	598	601	604	597	600	603
	599	602	605	294	297	300	295	298	301
604	296	299	302	293	296	299	292	295	298
	294	297	300	291	294	297	290	293	296