




Guide Sets

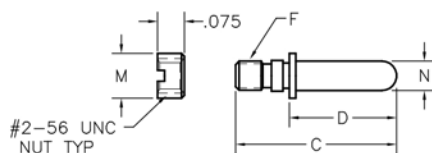


SY




SY Guide set
SYFF Two guide sockets
SYFM Guide set, reversed
SYMM Two guide pins

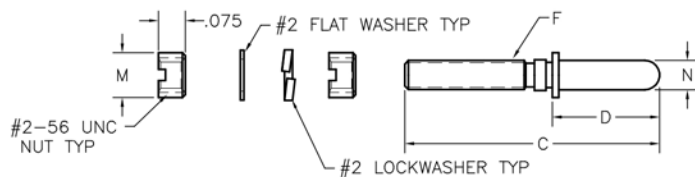


SYL

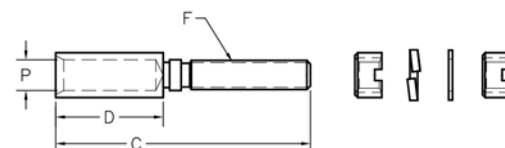


SYL Guide set
SYLFF Two guide sockets
SYLFM Guide set, reversed
SYLMM Two guide pins

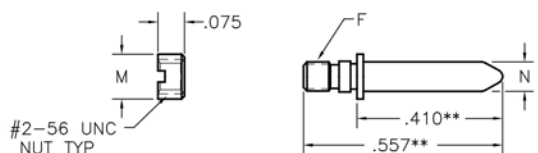

SC





Guide Sets, Polarized

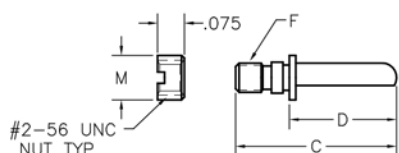


SY-

SEE NOTE 1

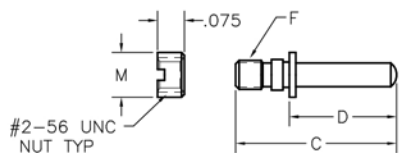

SY-

SEE NOTE 2



Notes:

1. For polarized "D" shaped guides, see WA-17. Polarizing also available for SYL- and SC- guide sets. To order, use P/N WTBSY-*, WTBSYL-* or WTBSC-*. See WA-17 for dash number requirement (example WTBSY-33).
2. For universal type test connector, see WA-17.
3. For nut spanner wrench, refer to Data Sheet on WA-9.
4. When installing guide sets, apply Loctite® to threads.
5. Under normal conditions, jackscrews are at socket contact position #1, and jacksockets are at pin contact position #1.
6. Spanner nuts, lockwashers and flat washers shall be supplied separately.

DIMENSIONS							
PART NUMBER	FOR MOLDING TYPE	C	D	F	M	N	P
WTBSC	WTB COAX	**	**	#2-56 UNC THD	.125 DIA	.082 DIA	.086 DIA
WTBSY	WTA,WTB,WG,WGA	.450	.300				
WTBTSY	WTBT	.653					
WTKSY	WTK	.712					
WTBSYL	WTA,WTB,WG						