


## 1 • ROW Strip Connectors Board to Cable

.050"


**MA-1**

2 thru 60 Contacts


MA-1D1-004-325-A0300




MA-141-004-261-A03WS

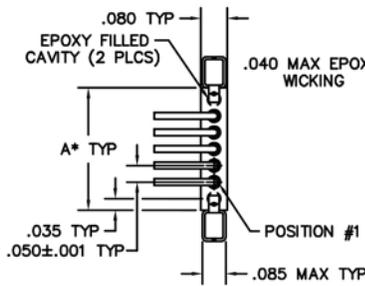


TERMINATION VIEW




PLUG




RECEPTACLE




TERMINATION VIEW

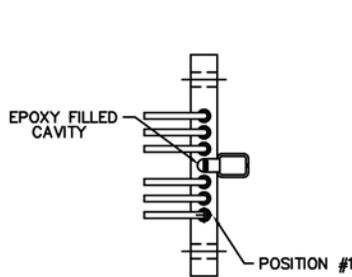


TERMINATION VIEW



PLUG



RECEPTACLE



TERMINATION VIEW

### OPTIONAL MOUNTING HOLES

#### DIMENSIONS

To determine connector length (Dim "A"):

Multiply the number of cavities in one row by .050"	.....	"
Add fixed end lengths (constant, .010" x 2)	.....	0.02"
Add .150" for each mounting hole	.....	"
Total Length:	.....	"

Notes:  
Length over 2" may require support to insure alignment.  
When using one lock screw, use centermost available hole.  
\* = Maximum length is 3.020". Maximum number of contacts must be reduced to accommodate hardware and mounting holes.